

Forest biomass for energy in the EU: current trends, carbon balance and sustainable potential

for BirdLife Europe, EEB, and Transport & Environment

- FINAL REPORT -

prepared by

IINAS - International Institute for Sustainability Analysis and Strategy

EFI - European Forest Institute, and

JR - Joanneum Research

Content

List of Tables	iii
Acronyms.....	iv
Executive Summary.....	v
1 Introduction and Overview	1
1.1 Scope and Overview	1
1.2 Introduction	2
2 Sources and Potential of Woody Biomass.....	4
2.1 Woody Biomass Potentials with Low Biodiversity Risks	4
2.2 Methodology	6
2.3 Forest Biomass Mobilization Potentials	8
2.4 Results	10
3 GHG Balances of Woody Bioenergy	19
3.1 Methodology for GHG Emission Calculation	21
3.2 Emission Factors	22
3.3 GHG Emission Factors for Using Forest Bioenergy	25
4 Scenarios for Woody Bioenergy in the EU	26
4.1 The Reference (REF) Scenario	26
4.2 The GHG Reduction (GHG) Scenario	29
4.3 The Sustainability (SUS) Scenario	31
4.4 Summary of the Scenarios	33
5 Scenario Results	33
5.1 Electricity Generation	34
5.2 Heat Production	35
5.3 Transport Fuels	36
5.4 Final Energy Demand	37
5.5 Primary Energy Supply	38
5.6 GHG Emissions from Bioenergy	41
5.7 Overall GHG Emissions from Energy Supply and Use	45
6 Conclusions and Policy Implications	48
References	50

List of Figures

Figure 1	Forest Wood Mobilization Potential in this Study (left column) and Comparison with Scenarios from Previous Studies (right column).....	9
Figure 2	Forest Biomass Potentials 2010-2030 from Final Harvest, Thinning and Pre-commercial (PC) Thinning	12
Figure 3	Non-Forest Woody Bioenergy Potentials 2020 and 2030	12
Figure 4	Effect of Removing Constraints for Residue Extraction from Protected Forests	13
Figure 5	Effect of Increasing the Area of Strictly Protected Forests by 5% on Forest Biomass Potentials in 2020	14
Figure 6	Effect of Additional 5% Strict Forest Protection plus 5% retained Trees on Forest Biomass Potentials	15
Figure 7	Effect of Stricter Environmental Criteria on Availability of EU28 Forest Biomass in 2020 and 2030	16
Figure 8	(a) GHG Emission Factors excluding Supply Chain Emissions for One-time Biomass Use for Austrian Forest Conditions and (b) Effective GHG Emission Factors for a Specific Supply Scenario (B2) for all EU28	23
Figure 9	Renewable Electricity Generation in the EC REF scenario for the EU27 from 2010-2030.	27
Figure 10	Heat Supply in the EC REF Scenario for the EU27 from 2010-2030	28
Figure 11	Electricity Generation in the EU27 from 2010-2030	34
Figure 12	Final Energy Supply for Heat in the EU27 from 2010-2030.....	36
Figure 13	Final Energy Supply for Transport in the EU27 from 2010-2030.....	37
Figure 14	Final Energy Demand in the EU27 from 2010 to 2030.....	38
Figure 15	Primary Energy Supply in the EU27 from 2010-2030.....	39
Figure 16	Primary Woody Bioenergy in the EU27 from 2010-2030 by source	39
Figure 17	Primary Woody Bioenergy in the EU27 from 2010-2030 per Sector	40
Figure 18	GHG Emissions from Woody Bioenergy 2010 - 2030 (20 Year Time Horizon)	42
Figure 19	GHG Emissions from Woody Bioenergy 2010 - 2030 (100 Year Time Horizon)	43
Figure 20	GHG Emissions from Woody Bioenergy 2010 - 2030 Depending on Time Horizons and Forest Reference Cases.....	44
Figure 21	Life-Cycle GHG Emissions from Energy Supply and Use in the EU27 from 2010-2030 with GHG Emissions from Forest Bioenergy for 20 Year Time Horizon and Optimistic Forest Reference Case	45
Figure 22	Life-Cycle GHG Emissions from Energy Supply and Use in the EU27 from 2010-2030 with GHG Emissions from Forest Bioenergy for 20 Year Time Horizon and Pessimistic Forest Reference Case	46
Figure 23	Life-Cycle GHG Emissions from Energy Supply and Use in the EU27 from 2010-2030 with GHG Emissions from Forest Bioenergy for 100 Year Time Horizon	47

List of Tables

Table 1	Key Facts on European Forests.....	3
Table 2	Reference Potential for Biomass from EU28 Forests 2010-2030	11
Table 3	Potential Availability of Forest Biomass from Final Harvest, Thinnings and Pre-commercial (PC) Thinning for Reference Mobilization, Additional Constraints, and Low Mobilization 2010- 2030.....	17
Table 4	Forest Biomass Potential in Energy Equivalents from Final Harvest, Thinning and Pre-commercial (PC) Thinning for Reference Mobilization, Additional Constraints, and Low Mobilization 2010-2030.....	18
Table 5	Summary of Reference Systems for various Biomass Types.....	20
Table 6	Life-Cycle GHG Emission Factors for European Bioenergy Supply Chains in 2020 and 2030.....	21
Table 7	The effective greenhouse gas emission factors for a specific supply scenario (B2 Medium) by country.....	24
Table 8	Forest Bioenergy GHG Emission Factors for C Stock Changes	25
Table 9	Scenario Description	33
Table 10	Bioenergy Demand and Potentials in the EU27 from 2010-2030	40

Acronyms

AEBIOM	European Biomass Association
BMU	Bundesministerium für Umwelt, Naturschutz und Reaktorsicherheit (German Federal Ministry for Environment, Nature Protection and Nuclear Safety)
EC	European Commission
EEA	European Environment Agency
EFI	European Forest Institute
ETS	EU Emissions Trading System
EU	European Union
FAO	Food and Agriculture Organization of the United Nations
GEF	Global Environment Facility
GIZ	Deutsche Gesellschaft für Internationale Zusammenarbeit GmbH
IC	Imperial College
IINAS	International Institute for Sustainability Analysis and Strategy
IPCC	Intergovernmental Panel on Climate Change
JRC	Joint Research Centre
M	Million
MS	Member States
MtOE	million tons of oil equivalent
RED	Renewable Energy Directive (EU 28/2009)
t	ton
tOE	tons of oil equivalent
UNECE	United Nations Economic Commission for Europe
UNEP	United Nations Environment Programme
WWF	World-Wide Fund for Nature

Executive Summary

This study aims to clarify possibilities and implications of woody bioenergy supply for the natural environment and climate for the EU by 2020 and 2030.

For this, the amount of forest-derived and woody biomass is estimated that could be sustainably supplied for energy uses without compromising material uses of wood. Particular attention is given to biodiversity and GHG emissions implications of woody bioenergy supply.

The role of sustainable woody bioenergy in the future EU energy system was then analyzed for electricity, heat and transport fuels, taking into account the potentials for energy efficiency, and non-bioenergy renewables.

Three scenarios were modeled to evaluate how sustainable woody bioenergy could be used by 2020 and 2030:

- The reference scenario (REF) is based on the EC 2013 PRIMES reference. Overall demand for material uses of wood will increase, and co-firing of imported pellets becomes relevant. In REF, bioenergy from EU forest will provide about 1700 PJ by 2030, and woody residues and SRC will contribute with 1300 PJ while about 750 PJ of wood pellets would be imported to the EU. Non-woody bioenergy would contribute about 600 PJ.
- Two contrasting scenarios - one for greenhouse-gas emission reduction (GHG), and one for ambitious sustainability (SUS) assume **more stringent energy efficiency and higher renewable energy targets**.
- The reduced GHG emissions scenario (GHG) considers C stock changes for forest bioenergy, and implements cascading use of woody material. With that, the use of EU forest products is reduced to 1100 PJ by 2030, and imports can be reduced by 80 %. Domestic woody bioenergy from residues, wastes and SRC would supply 3100 PJ by 2030, a doubling compared to the REF scenario. Non-woody bioenergy use would also increase to 1200 PJ, mainly from straw, and manure.
- The sustainable bioenergy scenario (SUS) assumes same demand as in the other scenarios but reduces forest bioenergy use to avoid associated risks, especially from imports. As in the GHG scenario, cascading use of woody material is massively increased. The use of EU forest bioenergy will be only about 350 PJ by 2030, and **no woody bioenergy would be imported**. The use


of woody residues, wastes and SRC would increase to 2700 PJ, and non-woody bioenergy would contribute about 3100 PJ.

The implementation of stringent energy efficiency measures in all scenarios would significantly reduce the final energy demands for heat and transport while electricity demand could remain almost constant.

For electricity generation, the share of woody bioenergy will remain at 5% in the REF and GHG scenarios, while in the SUS scenario it will be less than 1 % by 2030. The amount of woody bioenergy used for heat would be about 8% (REF) and 9% (GHG+SUS) by 2030, but the source of the wood is very different in the scenarios.

For transport, the contribution of woody bioenergy in the REF scenario would reach 2% by 2030, while in the GHG and SUS scenarios it will be 6% - 7%, respectively. The GHG scenario would further reduce feedstocks imports by 60% compared to the REF scenario by 2030, while the SUS scenario would phase-out imports completely. Both the GHG and SUS scenarios would instead use woody residues and straw for 2nd generation biofuels.

The different role of woody bioenergy in the scenarios is depicted in the following figure for the respective EU energy demand sectors.

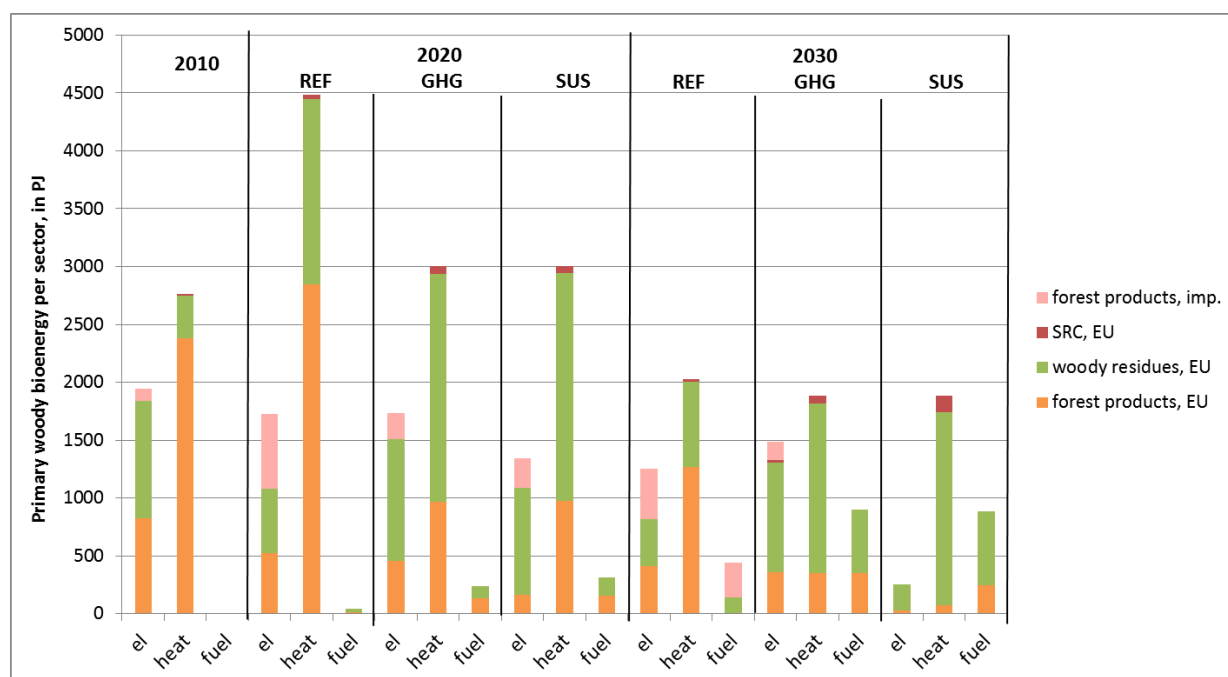


Source: IINAS calculations

The **GHG emissions from bioenergy** in the REF scenario would reach 59 to 116 Mt CO₂eq by 2030, depending on the time horizon of the forest C balance, and the forest reference case assumed.

In contrast, bioenergy GHG emissions by 2030 would be -40 to 8 Mt CO₂eq in the GHG scenario and -45 to -33 Mt CO₂eq in the SUS scenario, respectively.

This includes a reduction of GHG emissions from displaced electricity and construction materials due to cogeneration and cascading use of woody biomass in new buildings in the EU.

The **overall GHG balance** must include emissions from fossil, nuclear and non-bioenergy renewables and was calculated using life-cycle data which also factor in fossil fuel imports accordingly, as shown in the following figure.

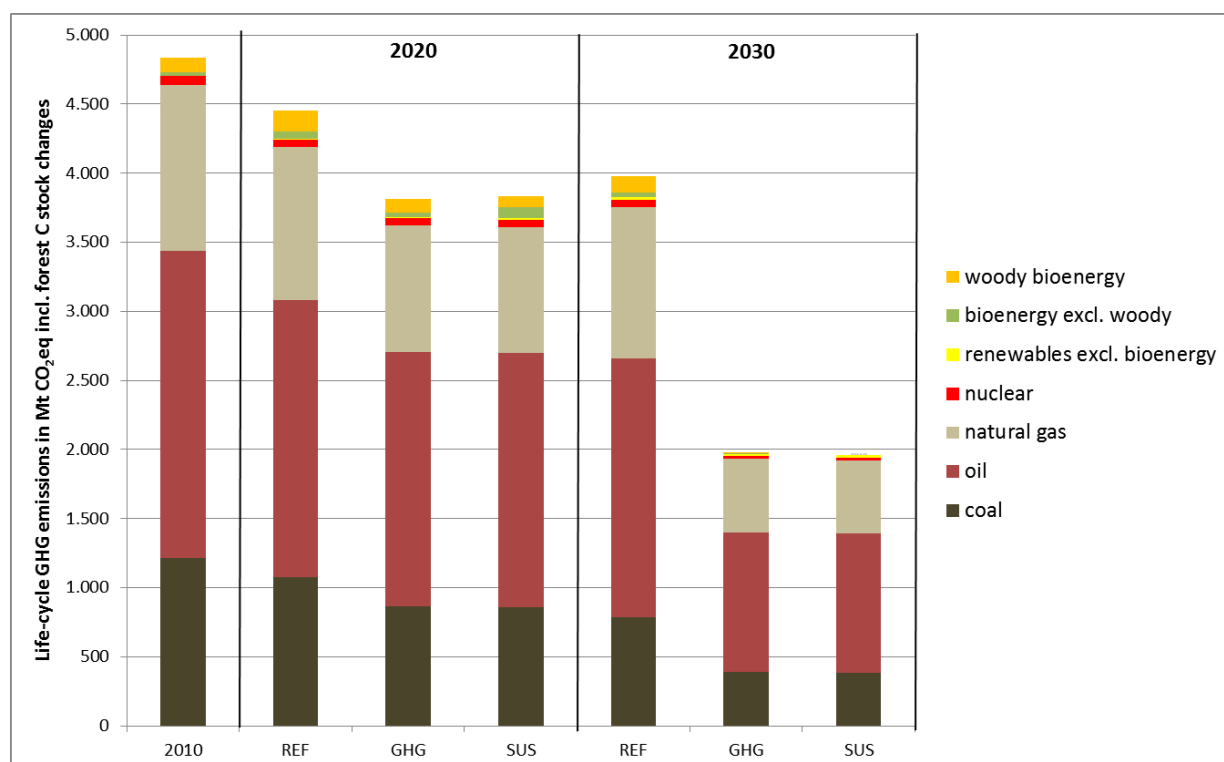

Source: IINAS calculations; GHG emissions from woody bioenergy are shown for the 20 year time horizon and the pessimistic forest reference case (i.e. the worst-case)

This clearly indicates that biogenic GHG emissions from **woody bioenergy are rather small**, compared to the emissions from the remaining fossil fuels.

The differences between the results for the 20-year time horizon and the ones for the 100 year time horizon are also quite small, showing that the discussion of the “carbon debt” associated with forest bioenergy becomes **insignificant if sustainable and low-C options for forest bioenergy are used**, and the total energy system is considered.

The scenario results also show that with **regard to policy**,

- sustainable forest biomass potentials in the EU will be reduced by up to 30 % by 2030 if stringent sustainability requirements are considered;
- sustainable forest biomass potentials still suffice to meet woody material demands if **resource-efficient cascades** are implemented, more paper recycled and post-consumer wood be re-used;
- reducing energy demand by implementing stringent energy efficiency targets is key;
- a sustainable scenario **without** bioenergy imports and using only about 25% of the EU forest bioenergy consumed in 2010 is possible as long as woody and agricultural residues are mobilized;
- cascading biomass use for energy, improving biogenic waste collection and recycling allow for significant net GHG reductions;
- if sustainable and low-C options for forest bioenergy are used, the “carbon debt” discussion is not relevant.

Current EU and Member State energy and climate policies **do not stimulate** these developments, though:

- Bioenergy, forest, and waste policies are fragmented and unaligned, and incentive schemes mainly address bioenergy **without** considering the full GHG emissions from bioenergy use.
- Bioenergy supply - especially from forests and for electricity/heat - is not subject to any coherent sustainability regulation. Only few Member States have started to develop respective policies, which might lead to **imbalances within** the EU if no framework regulation is implemented.
- Imports of woody bioenergy is - with very few exceptions - **unregulated** as well, but growing relevance of pellets for bioelectricity (co-firing) imply a respective need for EU-level action to avoid internal market distortions.

Last but not least, sustainable woody bioenergy supply also requires regulating biodiversity impacts for forests in a legally binding manner for both the EU, and imports from abroad.

1 Introduction and Overview

1.1 Scope and Overview

The Brussels-based NGOs Birdlife Europe, European Environment Bureau and Transport & Environment commissioned the International Institute for Sustainability Analysis and Strategy (IINAS) in cooperation with the European Forest Institute (EFI) and Joanneum Research (JR) to carry out a **brief study on sustainable woody bioenergy in the EU-27**.

The study aims to clarify implications of increasing forest bioenergy supply for the natural environment and climate until 2020, and to estimate the amount of forest-derived and woody biomass that could be sustainably supplied for energy uses within the EU to 2030 (quantitatively) and 2050 (qualitatively). Given this background the study:

- classified woody biomass resources (Section 2.1)
- identified woody bioenergy potentials in the EU which pose low biodiversity risks (Section 3)
- determined the greenhouse-gas emission balances of woody bioenergy for several time horizons and reference assumptions (Section 4)
- developed three scenarios for future woody bioenergy use in the EU for 2020 and 2030 (Section 5), and
- determined the GHG balances of these scenarios (Section 6) as well as
- implications for policy (Section 7).

Due to limitations in scope and available budgets, the study had to **simplify the modelling** of the EU energy system:

- Issues of renewable fluctuating power (e.g. storage, transmission, and system effects) for electricity were **not** explicitly considered
- No changes in the **mix** of non-bioenergy renewables (only minor adjustments of total supply) and in the fossil fuel **mix** (e.g. to reduce GHG emissions) were made.
- No changes in the demand for food/feed and respective ex- and imports were considered, thus **excluding** possible changes in available land resources.

Cost changes and implied economic effects were also outside of the scope of the analysis, although some respective data is available upon request.

1.2 Introduction

Woody and especially forest biomass has a relevant role to play within the Renewable Energy Directive (RED) 2020 target of a 20 % renewable energy share, as well in the ongoing discussions about a 2030 energy and climate strategy, and the longer-term 2050 perspective of a resource-efficient and sustainable European energy system.

From 1990-2010, total solid bioenergy production has more than doubled (Euroobserver 2012). In 2010, the EU used about 113 million tons of oil equivalent (MtOE) of primary biomass of which 9.5 MtOE were imported and 4.2 MtOE were exported (AEBIOM 2012).

In 2010, about half of all woody biomass was used for energy purposes (AEBIOM 2012). 50% of total woody bioenergy is used in the residential sector and 25% each by the wood industry, and powerplants (UNECE-FAO 2012).

According to the National Renewable Energy Action Plans (NREAPs), domestic supply of wood directly from forestry is expected to account for approx. 32 % of the total heat and power generated with biomass by 2020 (IC et al. 2012).

Results of the EU Biomass Futures project show that projected EU woody demands are considerably lower than sustainable EU bioenergy potentials for 2020 and 2030 (IC et al. 2012). Still, mobilization of wood will not depend just on availability but on prices, and resource efficiency as well as possible biodiversity, climate and social impacts. Trade-offs between these factors need to be assessed. On the other hand, at present, there are various European policies under revision that will have significant effect on medium-term biomass mobilization such as the EU RED “iLUC” revision¹, the sustainability criteria for solid and gaseous biomass² and the future of the EU Emission Trading System (ETS).

In 2010, the total area of forest in the EU27 area was over 157 million hectares (Mha) or almost 38% of land area (Forest Europe et al. 2011).

Of this, 133 Mha was estimated to be available for wood supply. The following table describes the key facts of the European forests.

¹ The EC proposal to revise the RED (EC 2012a), limiting the share of first generation biofuels from edible feedstocks in the transport sector to 5% and promoting advanced biofuels, and later proposals from the European Parliament and the Council found - as of late December 2013 - no majority.

² The EC will publish a report on sustainability criteria for solid and gaseous biomass, applying the same approach as for biofuels and bioliquids under the EU RED, but no binding legislation is expected (Volpi 2014).

Table 1 Key Facts on European Forests

	Unit	North	Central- West	Central- East	South- West	South- East	EU27
Forest area	Mha	69.3	36.9	22.5	30.8	29.9	157.2
Forest as % of total land	%	52.1	26.4	30.0	34.8	23.1	37.6
Forest per capita	ha	2.16	0.14	0.26	0.26	0.25	0.32
Forest area available for wood supply	Mha	54.5	34.4	19.6	24.8	21.9	133.3
Growing stock per ha	m ³ /ha	117	227	237	81	140	154
Net annual increment per ha [#]	m ³ /ha	4.7	7.8	8.0	3.9	5.9	5.8
Fellings	Mm ³	180.5	172.4	93.2	29.3	16.9	469.3
Fellings as % of increment	%	71.1	65.0	66.1	37.4	46.9	64.9
Roundwood removals from forest	Mm ³	152.7	150.5	80.7	33.0	36.1	412.8
Forest undisturbed by man	%	5.8	0.3	1.7	0.4	5.5	3.1
Semi-natural forest	%	92.3	85.8	90.9	86.0	77.2	88.6
Plantations	%	1.9	13.8	7.4	13.6	17.3	8.2
Share of forest dominated by introduced tree species	%	1.6	10.7	3.7	7.3	1.4	5.2
Share of forest area protected for biodiversity	%	6.6	10.4	3.5	23.3	5.5	10.6
Share of forest area protected for landscape	%	2.3	26.2	12.3	6.0	0.8	10.1
Share of forest area designated for the protection of soil, water and other ecosystem services	%	11.9	17.6	25.0	41.6	9.8	19.8
Share of forests in private ownership*	%	70.7	62.3	26.9	72.5	16.6*	59.6
Forest sector work force	1000 FTE	346	923	658	582	405	2560

Source: Forest Europe et al. (2011); FTE = full time equivalent employees

2 Sources and Potential of Woody Biomass

This study distinguishes between primary and secondary sources, as follows:

- Primary biomass sources
 - Woody biomass from forests (residues, thinnings, stemwood)
 - Woody biomass from landscape care, urban park management, gardening
 - Short-rotation coppice on agricultural land
- Secondary biomass sources
 - Solid forest and wood industry by-products (sawmill residues, bark, wood industry wastes)
 - Liquid forest industry by-products (black liquor)

A description of these categories is given in Annex 1.

2.1 Woody Biomass Potentials with Low Biodiversity Risks

Bioenergy policies which result in high levels of mobilization may have adverse effects on biodiversity (e.g. Verkerk et al. 2011a). The loss and degradation of the forest types that are naturally most diverse as well as the low levels of decaying wood in managed forests are the most relevant threats to forest biodiversity (Hanski, Walsh 2004).

37 Mha of the European forest area is protected for conservation purposes by the Natura 2000 network (EC, 2009; Forest Europe, 2011). The legal constraints on forest management in these areas range from a total ban on management to no limitations for sustainable management.

Protected areas play a critical role in conservation of biodiversity, maintaining genetic resources, protecting important ecosystem functions and helping to protect many fragile human communities and cultural landscapes (Dudley, Phillips 2006).

Protected Areas of various levels cover about 11% of forest area in the EU27. According to Forest Europe (2011), protected forests are classified in

- (i) Non active intervention (1%),
- (ii) Minimum intervention (3%) and
- (iii) Conservation through active management (7%).

In Northern Europe and in some Eastern European countries, restrictive protection with no or minimal intervention dominates, whereas in Central and

Southern European countries, active management in protected areas is emphasized (Forest Europe 2011).

The uniform forest structure associated with commercial forest management is a cause for concern when considering sustainability. The retention of some trees beyond the normal harvest cycle has been used as an approach to counteract this. It involves leaving some live and dead trees and small areas of intact forest in situ at the time of harvest (Gustafsson et al. 2012). Deadwood in the form of both standing dead trees and down wood and debris, is an essential structural component for biodiversity in forest systems (Janowiak, Webster 2010) and it has been acknowledged as a measure of habitat quality (EEA 2011).

Due to shorter cycles, deadwood volumes can range from 2 m³/ha to 10 m³/ha in managed forests while in natural forest the amount of deadwood may reach more than 200 m³/ha (EEA 2011). Forest Europe (2011) reports that the average volume of deadwood, both standing and lying, in European Forests ranges from approximately 8 m³/ha in Northern Europe to 15 m³/ha in South-East Europe.

Although retention levels can range more than forty fold, a minimum amount of 5-10 % in terms of the area or wood volume retained has been suggested (Gustafsson et al. 2012).

Stricter environmental criteria

If more strict environmental criteria are applied, we can also evaluate how this might impact on forest biomass potentials. A lower mobilisation rate in comparison with the reference potential was examined which applied a stricter set of environmental constraints (see Annex Report). Some significant differences between this and the reference mobilisation included stricter constraints on residue and stump removal from unproductive poor soils, slopes, shallow soils and peatlands.

For the low mobilisation, application of fertilizer to limit detrimental effects of removing logging residue on the soil was not permitted. Stump extraction was also not permitted.

The main differences between the reference and low mobilisations include:

- soil productivity was not considered a constraining factor for crown biomass removal after early thinning in the reference mobilisation as it was assumed that fertiliser could be applied to replace lost nutrients
- soil productivity was not considered a constraining factor for residue removal after final felling in the reference mobilisation as it was assumed that fertiliser could be applied to replace lost nutrients

- A maximum of 67% of residue removal from thinning was allowed on poor soils for the reference mobilisation but residue extraction was not allowed for the low mobilisations.
- 67% of stumps after final felling were extracted on poor soils for reference mobilisation, 0% for low.
- The reference mobilisation allowed stump extraction from peatland areas however in practice this only occurred in Fennoscandia where frozen winters occur, as constraints on soil bearing capacity prevented this extraction elsewhere.
- 67% of logging residues from thinning could be extracted from slopes up to 35% for the reference mobilisation, 0% for low.
- 67% of stumps from final felling could be extracted on slopes up to 35% for high mobilisation, 0% for low.
- Stump extraction did not occur in the low mobilisation.

Hanski and Walsh conclude that neither the current level of deadwood or protected areas are enough to avoid adverse effects on biodiversity (extinction debt³) in Northern and Central Europe forests.

In order to reverse that situation, the amount of decaying wood at stand level should be 50 m³/ha (or 20-30 m³/ha if this average is met in wider areas). However, since this threshold is not achievable in managed forests they have proposed increasing the network of protected areas of various forest types to at least 10 percent of total forest area.

2.2 Methodology

For this study, we build on recent forest biomass resource assessments done for the EUwood and EFSOS II studies (Mantau et al. 2010; UN-ECE/FAO 2011) which used the large-scale European Forest Information SCENario model (EFISCEN) (Sallnäs 1990; Schelhaas et al. 2007). These studies examined biomass resource potentials under various development scenarios to 2020 and 2030. We evaluate the biomass potentials which are in line with various sustainability criteria and

³ Extinction debt refers to the numbers of species that will disappear sooner or later under the current environmental conditions

focus in particular on the quantification of biomass potentials which still leave room for more ambitious protection of biodiversity.

The realisable potential for forest biomass supply was estimated for the period 2010 to 2030 in three steps.

First, the maximum theoretical availability of forest biomass in Europe was estimated using EFISCEN (see box). These projections were based on recent, detailed National Forest Inventory (NFI) data on species and forest structure and provided the theoretical biomass potentials from broadleaved and coniferous tree species separately in the following assortment categories: stemwood; logging residues (i.e. stem tops, branches and needles); stumps; early thinning (thinning in very young stands; also referred to as pre-commercial thinning).

Second, multiple environmental and technical, constraints were defined that reduced the amount of biomass that can be extracted from forests.

Third, the theoretical potential according to EFISCEN was combined with the constraints to assess the realisable biomass potential from European forests (Verkerk et al. 2011a).

EFISCEN is a large-scale forest scenario model that assesses the availability of wood, and projects forest resource development on regional to European scale (Nabuurs et al., 2007; Eggers et al., 2008). A detailed model description is given by Schelhaas et al. (2007). In EFISCEN, the state of the forest is described as an area distribution over age- and volume-classes in matrices, based on forest inventory data on the forest area available for wood supply. Transitions of area between matrix cells during simulation represent different natural processes and are influenced by management regimes and changes in forest area. Growth dynamics are simulated by shifting area proportions between matrix cells. In each 5-year time step, the area in each matrix cell moves up one age-class to simulate ageing. Part of the area of a cell also moves to a higher volume-class, thereby simulating volume increment. Growth dynamics are estimated by the model's growth functions whose coefficients are based on inventory data or yield tables.

To assess biomass in branches, coarse roots, fine roots and foliage, stemwood volumes were converted to stem biomass by using basic wood density (dry weight per green volume) and to whole-tree biomass using age- and species specific biomass allocation functions. During thinning and final felling logging residues are formed. These residues consist of stemwood harvest losses (e.g. stem tops), as well as branches and foliage that are separated from the harvested trees. In

addition to these logging residues, stumps and coarse roots are formed. In EFISCEN, it is possible to define which share of the residues and stumps/coarse roots are removed from the forest during thinning and final felling. Residues and stumps/roots that are left in the forest will decay eventually. During harvest operations more stemwood is felled than is removed from the forest. The proportion of volume from thinning or final felling being removed from the forest was calculated at country level, distinguishing between coniferous and broadleaved species (UNECE/FAO 2000). The proportion that is not removed as logs represents stemwood harvest losses and could be extracted as part of the logging residues.

2.3 Forest Biomass Mobilization Potentials


In this study, we examine biomass potential in the context of EU 2020 policy objectives. The reference potential we employ is the maximum *realizable* potential under B2 emissions⁴.

This realizable potential is obtained by applying various environmental and technical constraints to a theoretical potential which is based on the average volume of wood which could be harvested, taking into account annual growth increment, age structure, stocking level and harvest losses (Mantau et al. 2010). It assumes a strong focus on using more wood for bioenergy and that policy recommendations have been successfully translated into measures that lead to an increased mobilization of wood, including formation of more forest owner associations and cooperatives which develop improved access of wood to the markets. It is further assumed that increased mechanization is adopted across Europe with existing technologies being shared between countries through improved information exchange. To exploit this potential, biomass harvesting guidelines would not be restrictive. The negative environmental effects of intensified use of forest resources would be weighed against and considered less important than negative effects of continued reliance on fossil fuels. Fertiliser application is allowed to compensate for the loss of nutrients through forest

⁴ The mobilization potentials for 2020 and 2030 utilized the B2 socioeconomic scenario from the IPCC (Nakicenovic et al. 2000). The B2 storyline and scenario family describes a world in which the emphasis is on local solutions to economic, social, and environmental sustainability. In the B2 reference future, production and consumption growth rates slow down over the outlook period, with the exception of sawn-wood consumption. This slowing down of consumption growth is most pronounced for paper products and wood pulp. This is consistent with a future world characterised by heightened environmental concern, where, e.g., a higher demand for bioenergy drives up the prices of inputs for the wood-based panels and pulp & paper industry, while at the same time the sawn-wood industry will mainly benefit from this development through a growing demand for energy efficient and renewable construction.

residue extraction. In this study we evaluate the effect of applying various additional sustainability constraints to the reference forest biomass potential.

Figure 1 Forest Wood Mobilization Potential in this Study (left column) and Comparison with Scenarios from Previous Studies (right column)

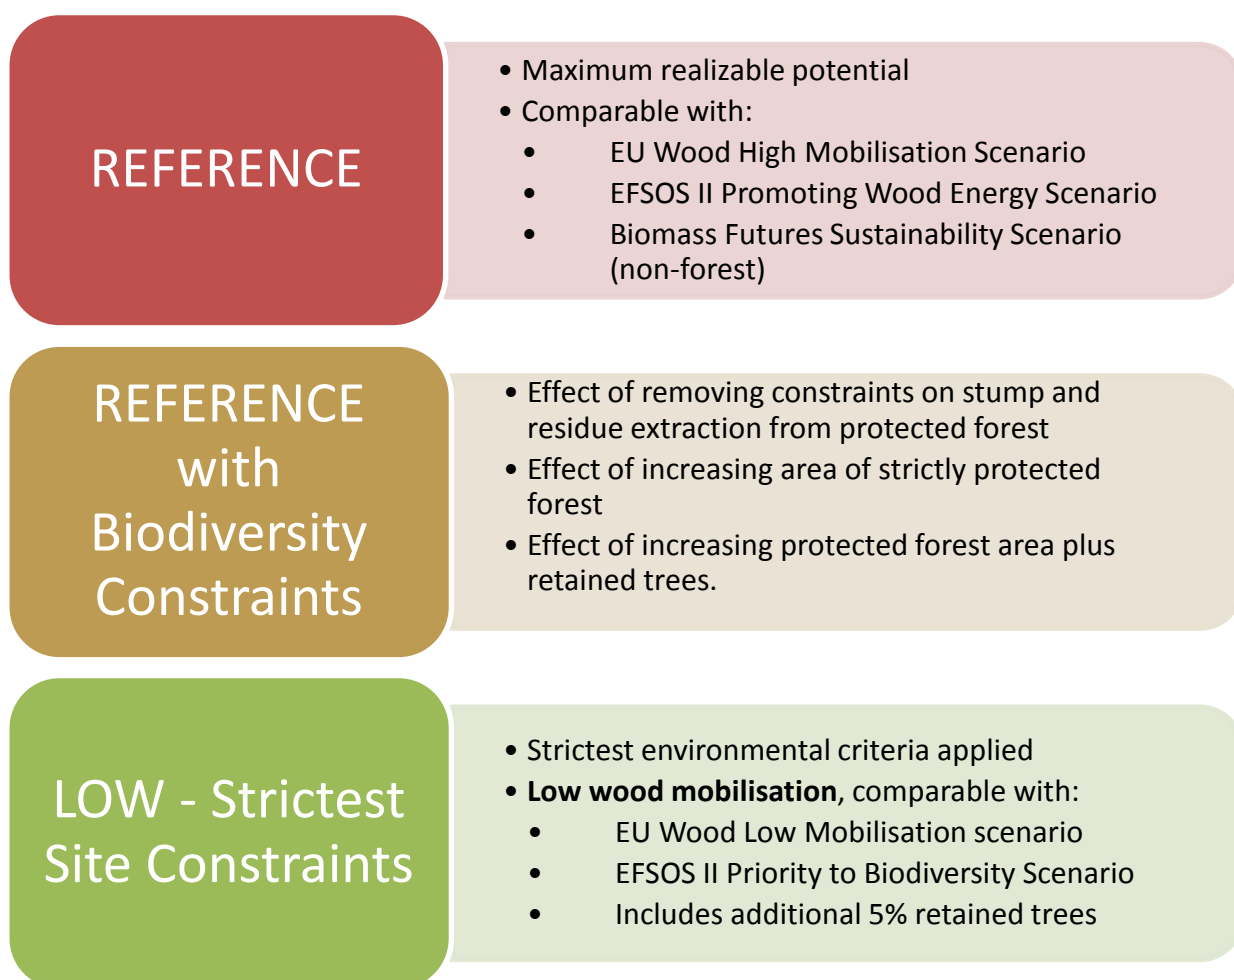

Source: EFI compilation

2.3.1 Constraints to Forest Biomass Potential

The theoretical forest biomass potentials estimated by EFISCEN are higher than what can realistically be supplied from the forest due to various environmental, social, technical, and economic constraints. The EUWood study identified quantifiable constraints and applied them to the theoretical potential (see Annex). The constraints considered in this study include site productivity, slope, soil surface texture, depth, compaction risk, bearing capacity, retained trees and protected forest. The constraints applied are described in further detail in the Annex.

For each constraint, a raster layer was created in ArcMap, with a resolution of 1 km. Extraction rates were assigned to the constraints according to the tables

above. On a cell-by-cell basis, all relevant layers were combined and the minimum extraction rate was defined for each cell. This was done separately for thinning residues, final felling residues and stumps. The resulting raster layers were then combined with a forest map, also on a 1 km resolution. Using zonal statistics, with an EU28 country layer or an EFISCEN region layer as zones, the weighted average per zone was then calculated.

2.3.2 Assessment of Biodiversity Risks

To examine the effect of increasing the area of protected forest on biomass potentials we used the previous resource assessments of EUWood and EFSOS-II and carried out a more detailed examination and quantification of biodiversity impacts. The sustainability constraints that were used to calculate the forest biomass potentials with EFISCEN were adjusted in order to examine their effect. This provides more information on how increasing the area of protected forests impacts on the biomass potentials from European forests.

Protected Areas:

Where management in protected areas is allowed under conservation designations, it is implemented as 'close-to-nature' or similar low-impact management (EEA 2007), with no or very limited residue or stump extraction. However, in fire prone areas, leaving residues in the forest could increase the forest fire risk.

This study assumed that residues could only be harvested in protected areas that have a high or very high fire risk.

Retained trees:

The effect of an increase of 5 % in retained trees was evaluated.

Stricter environmental criteria:

If more strict environmental criteria are applied, we can also evaluate how this might impact on forest biomass potentials. A low mobilization rate by comparison with the reference was examined which applied a stricter set of environmental constraints (see Annex).

2.4 Results

2.4.1 Potential of European Forests for Wood Supply


Biomass potentials from forests were calculated for EU28 countries for 2010-2030 (Table 2) – note that this includes potential uses from both industry and bioenergy. The largest contributor to available volumes is stemwood from thinnings and final harvest, while pre-commercial thinnings (using EUwood/EFSOS II assumptions) are rather low.

Table 2 Reference Potential for Biomass from EU28 Forests 2010-2030

Mm³ overbark in	2010	2020	2030
Austria	35.93	43.01	41.90
Belgium	5.22	5.97	5.80
Bulgaria	8.13	9.87	9.91
Croatia	7.21	8.34	8.16
Cyprus	0.04	0.04	0.04
Czech Republic	25.11	29.96	27.66
Denmark	3.97	4.59	4.87
Estonia	13.12	14.57	13.88
Finland	85.51	111.89	111.60
France	88.11	101.69	108.02
Germany	103.25	128.26	124.15
Greece	4.45	5.41	4.97
Hungary	10.81	12.90	12.64
Ireland	3.12	4.42	5.16
Italy	26.74	29.19	28.07
Latvia	18.39	20.23	24.65
Lithuania	10.54	12.26	13.40
Luxembourg	0.98	1.10	1.04
Malta	0	0	0
Netherlands	1.48	1.74	1.90
Poland	58.41	68.94	67.32
Portugal	10.80	12.36	13.78
Romania	32.54	36.73	36.13
Slovakia	11.38	12.52	12.93
Slovenia	8.43	9.41	9.10
Spain	24.79	30.52	29.80
Sweden	111.92	142.98	154.09
UK	15.45	17.28	17.60
Grand Total	725.86	876.20	888.57


Source: EFISCEN calculations; data in Mm³ overbark; note that no data was available for Malta. Croatian figures derived from EU averages, Cyprus figures derived from average Greek values

Figure 2 Forest Biomass Potentials 2010-2030 from Final Harvest, Thinning and Pre-commercial (PC) Thinning

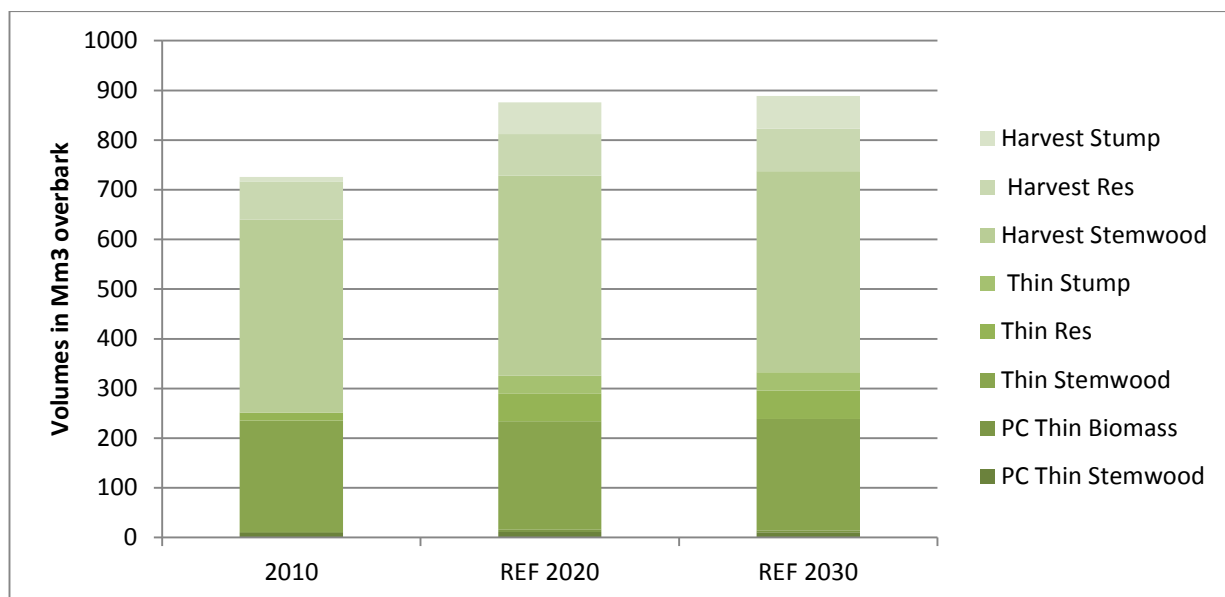

Source: EFISCEN calculations – EFI compilation; REF = reference potential; Res = residues; PC = pre-commercial

Figure 3 Non-Forest Woody Bioenergy Potentials 2020 and 2030

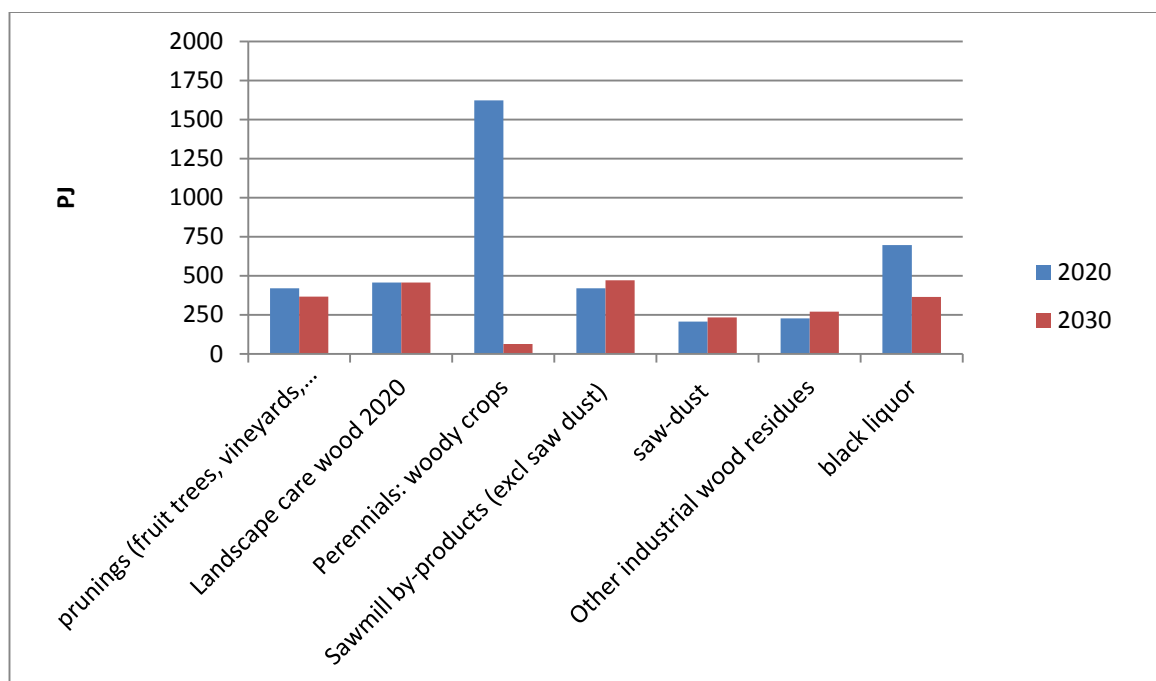

Source: IC et al. (2012) - Sustainability Scenario of the Biomass Futures project


Bioenergy potentials from non-forest biomass (see Annex for definitions) were also derived from data compiled in the Biomass Futures project (IC et al. 2012). To allow for comparison with forest potentials, the data is presented in PJ. These

assortments total 4057 PJ and 2231 PJ in 2020 and 2030, respectively. The drop in potential especially for SRC up to 2030 is due to carbon mitigation requirements becoming stricter in the sustainability scenario which considers GHG emissions from indirect land use change (IC et al. 2012).

2.4.2 Effects of More Protected Forest Areas

To evaluate the effect of the constraint on residue extraction from protected forest area, this constraint was removed from the model calculation, which results in an increase of total volume available from 876 Mm³ to 918 Mm³ in 2020 (Figure 4), and a respective increase from 888 to 931 Mm³ in 2030.


Figure 4 Effect of Removing Constraints for Residue Extraction from Protected Forests

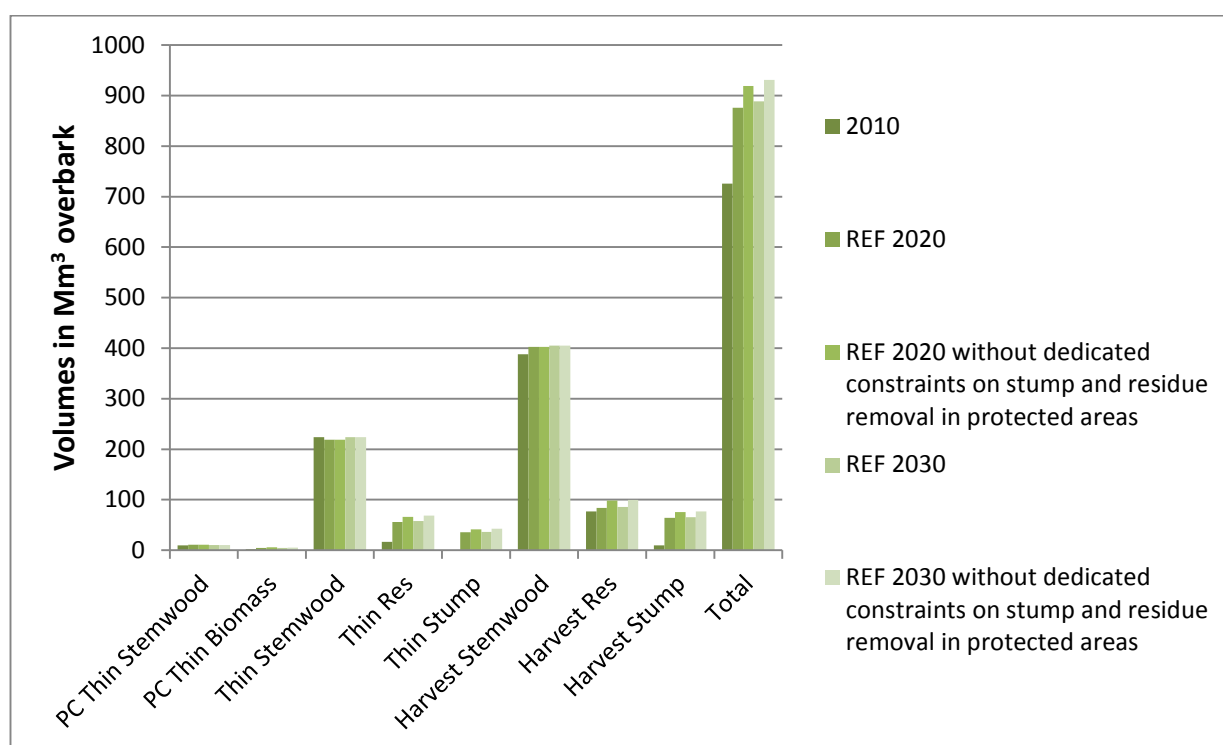

Source: EFISCEN calculations – EFI compilation; REF = reference potential; PC = pre-commercial

The effect of an increase of 5% in strictly protected forests was also quantified (Figure 5). This resulted in a decrease of 42 Mm³ in available volume (from 876 to 834 Mm³) in 2020 and 43 Mm³ (from 888 to 845 Mm³) in 2030.

Figure 5 Effect of Increasing the Area of Strictly Protected Forests by 5% on Forest Biomass Potentials in 2020

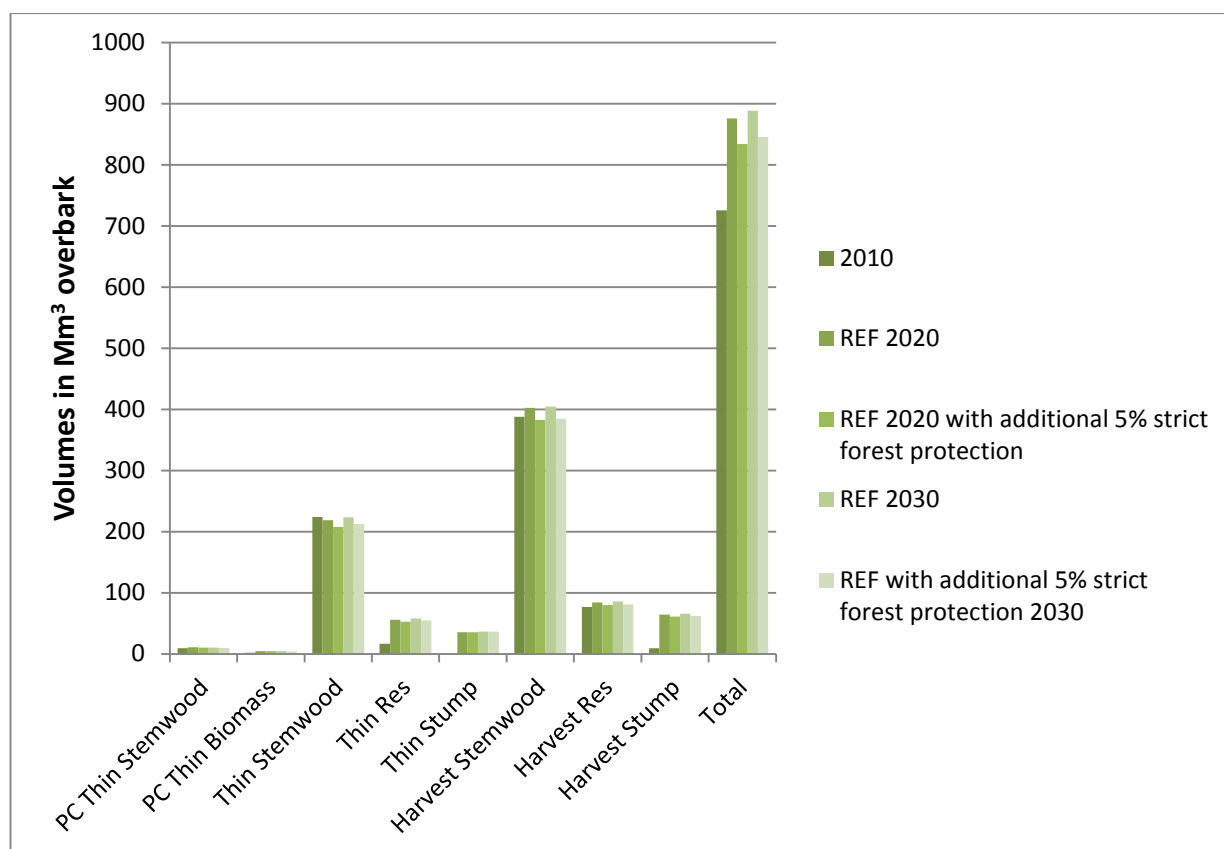


Source: EFISCEN calculations – EFI compilation; REF = reference potential; PC = pre-commercial

2.4.3 Effects of Higher Tree Retention

It is difficult to evaluate the effect of forest biomass mobilization on standing deadwood over the short time frame of this study as any policy objectives would take much longer than twenty years to make an impact. However it was possible to evaluate how an increase in retained trees would impact on the forest biomass potentials.

Figure 6 shows that a 5% increase in retained trees in combination with a 5% increase in strictly protected forest applied to the reference potential would result in a decrease from 876 Mm³ to 792 Mm³ in available forest biomass by 2020 and from 888 Mm³ to 803 Mm³ in 2030.

Figure 6 Effect of Additional 5% Strict Forest Protection plus 5% retained Trees on Forest Biomass Potentials

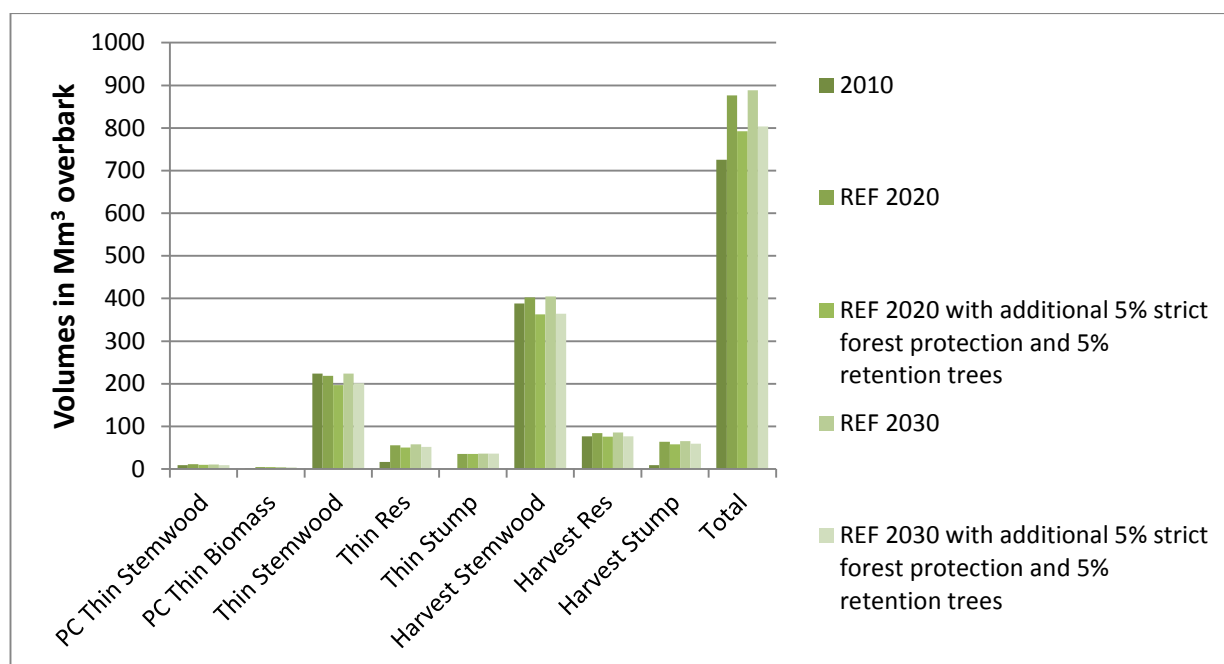

Source: EFISCEN calculations - EFI compilation; REF = reference potential; PC = pre-commercial

2.4.4 Effect of stricter environmental criteria


Some significant differences between the stricter set of environmental constraints and the reference mobilisation included stricter constraints on residue removal from unproductive poor soils and a maximum of 70% residue removal allowed on other soils.

For the low mobilisation which had the strictest environmental constraints, application of fertilizer to limit detrimental effects of removing logging residue on the soil was not permitted. Stump extraction was also not permitted.

These stricter environmental constraints had a significant effect on biomass availability (Figure 7).

The low mobilisation would give potential volumes of 583 Mm³ or 33% less available biomass compared with the reference mobilisation in 2020.

Figure 7 Effect of Stricter Environmental Criteria on Availability of EU28 Forest Biomass in 2020 and 2030

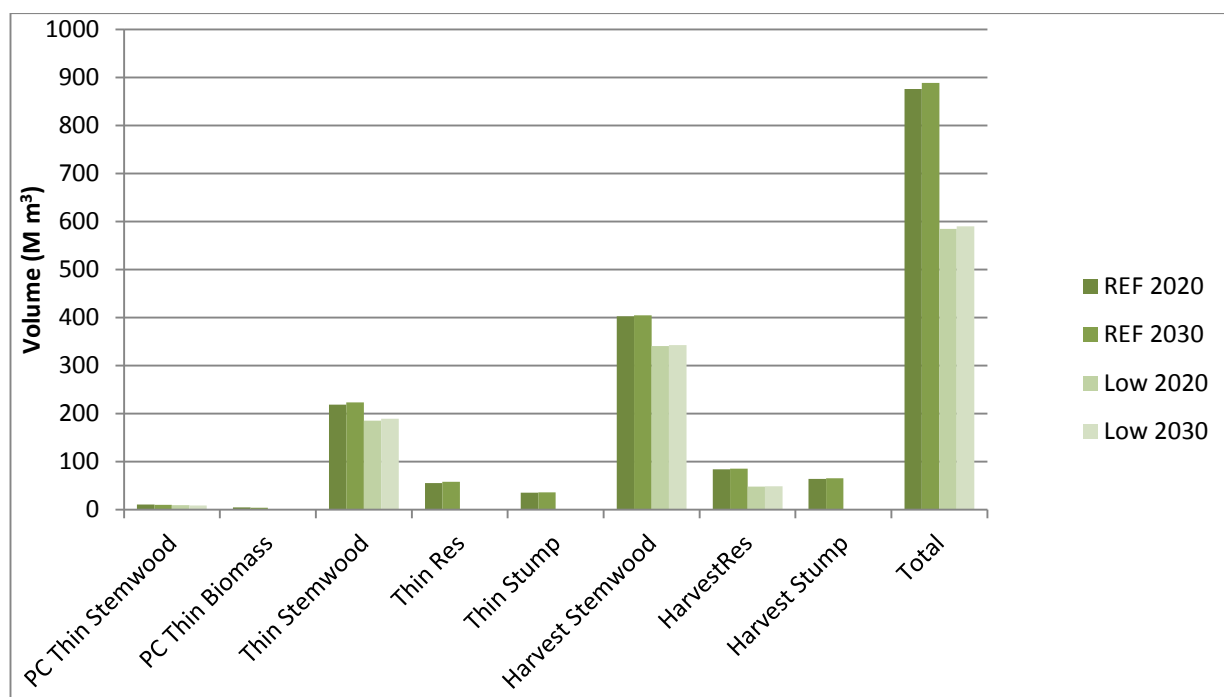

Source: EFISCEN calculations – EFI compilation; REF = reference potential; PC = pre-commercial

The reference mobilisation allowed limited residue extraction from forests located on peatland (see Annex Report Section 1). A 33% maximum extraction rate of stumps and residues was applied for thinning and final felling. Stump and residue extraction was not permitted from peatland forests for the Low mobilisations. In the EU Wood Methods report (Mantau et al. 2010), a sensitivity analysis was carried out which evaluated the effect of increased removal of residues and stumps from forests on peatlands (from 0%-33%).

If the restrictions on residue extraction on peatlands were reduced for environmental reasons (i.e. allow more extraction of residues), it was found in many countries to be technically still difficult to extract biomass from these areas due to the low soil bearing capacity.

Finland and Sweden were an exception to this, as harvesting on frozen soil is possible in these countries. This means that other constraints are often the main limiting factor and do not allow much more residues or stumps to be extracted.

Table 3 *Potential Availability of Forest Biomass from Final Harvest, Thinnings and Pre-commercial (PC) Thinning for Reference Mobilization, Additional Constraints, and Low Mobilization 2010- 2030*

Volumes (Mm³ overbark)	PC Thin stemwood	PC Thin residues	Thin stemwood	Thin residues	Thin stumps	Harvest stemwood	Harvest residues	Harvest stumps	Total
REF 2010	9.4	2.1	223.8	16.5	0.0	388.1	76.5	9.4	725.8
REF 2020	11.0	4.7	218.7	55.7	35.3	402.7	84.0	64.1	876.2
REF 2020 without dedicated constraints on stump and residue removal in protected areas	11.0	5.7	218.7	65.7	41.5	402.7	98.1	75.2	918.7
REF 2020 + additional 5% strict forest protection	10.4	4.5	207.8	52.9	35.3	382.6	79.8	60.9	834.1
REF 2020 + add. 5% strict forest protection and 5% retention trees	9.9	4.2	196.9	50.1	35.3	362.4	75.6	57.7	792.1
REF 2030	10.4	4.4	223.6	57.9	36.3	404.9	85.4	65.6	888.6
REF 2030 without dedicated constraints on stump and residue removal in protected areas	10.4	5.3	223.6	68.2	42.5	404.9	99.5	76.8	931.2
REF 2030 + additional 5% strict forest protection	9.9	4.1	212.5	55.1	36.3	384.6	81.2	62.4	846.0
REF 2030 + add. 5% strict forest protection + 5% retention trees	9.4	3.9	201.3	52.2	36.3	364.4	76.9	59.1	803.3
LOW 2020	9.4	0.6	185.3	0.0	0.0	340.9	48.4	0.0	584.5
LOW 2030	8.9	0.5	189.2	0.0	0.0	342.7	48.8	0.0	590.1

Source: EFISCEN calculations – EFI compilation

Table 4 Forest Biomass Potential in Energy Equivalents from Final Harvest, Thinning and Pre-commercial (PC) Thinning for Reference Mobilization, Additional Constraints, and Low Mobilization 2010-2030

Energy (PJ)	PC Thin stemwood	PC Thin residues	Thin stemwood	Thin residues	Thin stumps	Harvest stemwood	Harvest residues	Harvest stumps	Total
REF 2010	81.8	18.3	1947.1	143.6	0.0	3376.5	665.6	81.8	6314
REF 2020	95.7	40.9	1902.7	484.6	307.1	3503.5	730.8	557.7	7623
REF 2020 without dedicated constraints on stump and residue removal in protected areas	95.7	49.6	1902.7	571.6	361.1	3503.5	853.5	654.2	7992
REF 2020 + additional 5% strict forest protection	90.5	39.2	1807.9	460.2	307.1	3328.6	694.3	529.8	7258
REF 2020 + add. 5% strict forest protection and 5% retention trees	86.1	36.5	1713.0	435.9	307.1	3152.9	657.7	502.0	6891
REF 2030	90.5	38.3	1945.3	503.7	315.8	3522.6	743.0	570.7	7730
REF 2030 without dedicated constraints on stump and residue removal in protected areas	90.5	46.1	1945.3	593.3	369.8	3522.6	865.7	668.2	8101
REF 2030 + additional 5% strict forest protection	86.1	35.7	1848.8	479.4	315.8	3346.0	706.4	542.9	7361
REF 2030 + add. 5% strict forest protection + 5% retention trees	81.8	33.9	1751.3	454.1	315.8	3170.3	669.0	514.2	6990
LOW 2020 + 5% retention trees	82	5	1612	0	0	2966	421	0	5086
LOW 2030 + 5% retention trees	77	4	1646	0	0	2981	425	0	5134

Source: EFISCEN calculations; and conversion into energy by IINAS; energy content expressed as lower heating value of air-dry wood

3 GHG Balances of Woody Bioenergy

In addition to the biodiversity risks, the direct and total greenhouse-gas (GHG) emissions from bioenergy were analyzed. The emissions from bioenergy systems can be separated into two components:

- a) **Life-cycle emissions:** These are the emissions occurring due to biomass combustion and upstream processes (e.g. fossil fuel for harvesting, transport, processing) - see Section 3.1.1.
- b) **C stock change emissions:** These are CO₂ emissions from changes in the forest carbon stock, e.g. extraction of forest thinnings for bioenergy, and C absorption as the forest regrows. In the case of forest residues, a time series of emissions occurs if the residues were left to decay.

To calculate the C-stock change emissions it is necessary to define a **bioenergy system** (what happens to the carbon stocks when biomass for energy is extracted) and a **reference system** (what happens to the carbon stocks when biomass is **not** used for energy). It is important to realise that the reference system and its associated reference emission series is **counterfactual**. It should represent the most likely situation **in absence** of the bioenergy system. The selection of reference system effects the net emissions and energy dramatically.

Table 5 list the assumed reference uses of biomass in the analysis. In some cases where the choice of reference system is not clear, it is advisable to produce two net emission and energy series which represent the systems that produce the lowest and highest net emissions and energy. For example, for the analysis of pre-commercial thinning an optimistic and pessimistic model were created.

The C stock change emissions were calculated for 20 and 100 year time horizons⁵ to show the sensitivity of the results. Furthermore, optimistic and pessimistic forest reference cases were used in the calculation for the same reason.

⁵ The time-horizon indicator is the sum of emissions over the specified number of years due to of an action today. By using the time varying nature of the changes in carbon stocks is captured. However, the time-horizon is an indicator of emissions and not the actual emissions in a given year from an action sometime previously.

Table 5 Summary of Reference Systems for various Biomass Types

Biomass Source	Reference System								
Forest residues	Residues remain in the forest and decay naturally without catastrophic disturbance								
Stumps	Stumps remain in the forest and decay naturally without catastrophic disturbance								
Pre-commercial thinning	<p><u>Optimistic option:</u> Thinnings remain in the forest and decay naturally without catastrophic disturbance. The forest grows in a similar manner with and without biomass use for energy.</p> <p><u>Pessimistic option:</u> Pre-commercial thinning does not occur. The unthinned forest has higher C stocks than the thinned forest (i.e. parallel growth curves)</p>								
Commercial Thinning	<p>Thinning occurs in the same manner as in the bioenergy system, but the biomass from thinning is used for a mixture of purposes:</p> <table style="margin-left: auto; margin-right: auto;"> <tbody> <tr> <td>% Sawnwood</td> <td>0%</td> </tr> <tr> <td>% Panels</td> <td>25%</td> </tr> <tr> <td>% Paper</td> <td>22%</td> </tr> <tr> <td>% Energy</td> <td>53%</td> </tr> </tbody> </table>	% Sawnwood	0%	% Panels	25%	% Paper	22%	% Energy	53%
% Sawnwood	0%								
% Panels	25%								
% Paper	22%								
% Energy	53%								
Advanced Harvests	The forest is harvested, but later than the “optimal” time. In the bioenergy systems, the forest is harvested at the “optimal time”. The delay, as compared to the bioenergy system, allows for an increase in forest biomass, and biomass at final harvest. The same proportion extracted biomass is used <u>directly</u> for sawnwood, panels, paper and energy in both the bioenergy and reference systems								

Source: Consortium assumptions; for imported woody bioenergy (pellets), the same assumptions were applied

3.1 Methodology for GHG Emission Calculation

3.1.1 Life-Cycle GHG Emissions

The life-cycle emissions were calculated with GEMIS⁶, assuming that these are constant for all regions of Europe, but different over time (2010-2030)⁷.

The fossil-fuel emissions (from coal, oil, natural gas)⁸ and life-cycle GHG emissions from nuclear and non-biomass renewables are also calculated with GEMIS for 2020 and 2030 as EU averages.

The life-cycle GHG emissions (e.g., from transportation, processing) per unit of energy produced from woody biomass are 2 to 10 times smaller than the emissions from the changes in forest carbon stocks over a short-time frame (20 years), depending on the type of biomass feedstock.

Table 6 Life-Cycle GHG Emission Factors for European Bioenergy Supply Chains in 2020 and 2030

CO ₂ eq in g/MJ _{output}	2020	2030
pellets-EU forest-products	6.4	5.8
pellets-EU wood-industry	3.9	3.5
pellets-EU SRC	11.5	10.9
pellets-US-import	16.2	15.6
wood-logs EU	0.0	0.0
BtL-black-liquor-EU	0.3	0.3
BtL-forest-residue-EU	37.2	32.9
BtL-SRC-EU	49.4	44.9
EtOH2G-forest-residues-EU	7.6	7.5
EtOH2G-SRC-EU	18.4	18.0

Source: GEMIS version 4.8 (IINAS 2013); note that the emission data **exclude** CO₂ emissions from forest C stock changes, and also assume **no** indirect land use changes (iLUC)

3.1.2 Emissions from C stock changes in Forests

The time-varying GHG emissions from C stock changes in forests were modeled to reflect the growth rate of forests, decay rates of residues depend on forest

⁶ GEMIS (Global Emissions Model for integrated Systems) is a public-domain (i.e. freely available) life-cycle model and database maintained by IINAS (see www.gemis.de).

⁷ This simplification is needed to reduce the data requirements. From earlier projects, bioenergy life-cycle data for most EU Member States is available, but shows comparatively minor differences.

⁸ The oil and gas comparators for 2030 can be varied also to reflect synthetic crude oil ("Tar Sands") and shale gas ("fracking"). In the results presented here, the average oil and gas emissions were used which exclude these sources.

type, climate (temperature and precipitation) and residue quality, and the time horizon (20 vs. 100 years) as well as the forest reference case (counterfactual situation without bioenergy extraction). A more detailed description of the modelling assumptions and data background is given in the separate Annex Report.

3.2 Emission Factors

There are two types of emission factors to consider; the emission factor from the consumption of an amount of biomass in a single year, and the effective emission factor of the continuous consumption of biomass. The latter is calculated by summing the emissions from a specific year to the year of interest and dividing it by the total biomass consumed over the same period, hence it is the time average emission factor.


Figure 8a shows the emission factors excluding supply-chain emissions of the presented models for Austrian forests and conditions. For example, the emission factor for the use of residues decreases quickly with time. The effective emission factor, however, is dependent on the amount of biomass consumed in specific year.

For example, if the amount of bioenergy from residues is increasing the effective emission factor will decrease less quickly than for the case of consumption in a single year. This occurs because the effective emission factor includes both biomass extracted for many years and extracted recently. Since more biomass is extracted recently, it has a greater impact on the effective emission factor. Figure 8b shows the effective emission factors of the various biomass sources for a specified biomass scenario.

Of the five models, only biomass from the two residues the advanced harvest biomass have intensities that over time are below the intensities of fossil fuels (coal = 88 g CO₂/MJ, oil = 73 g CO₂/MJ, and natural gas = 51 g CO₂/MJ).

Typically the intensity should start somewhere near that of wood without regrowth (94 g CO₂/MJ). The advanced harvest model starts with a lower intensity because there are wood products created. The commercial thinning model starts with a higher intensity because material products are forsaken to create energy. The amounts above and below the typical value are approximately the same.

Figure 8 (a) GHG Emission Factors excluding Supply Chain Emissions for One-time Biomass Use for Austrian Forest Conditions and (b) Effective GHG Emission Factors for a Specific Supply Scenario (B2) for all EU28

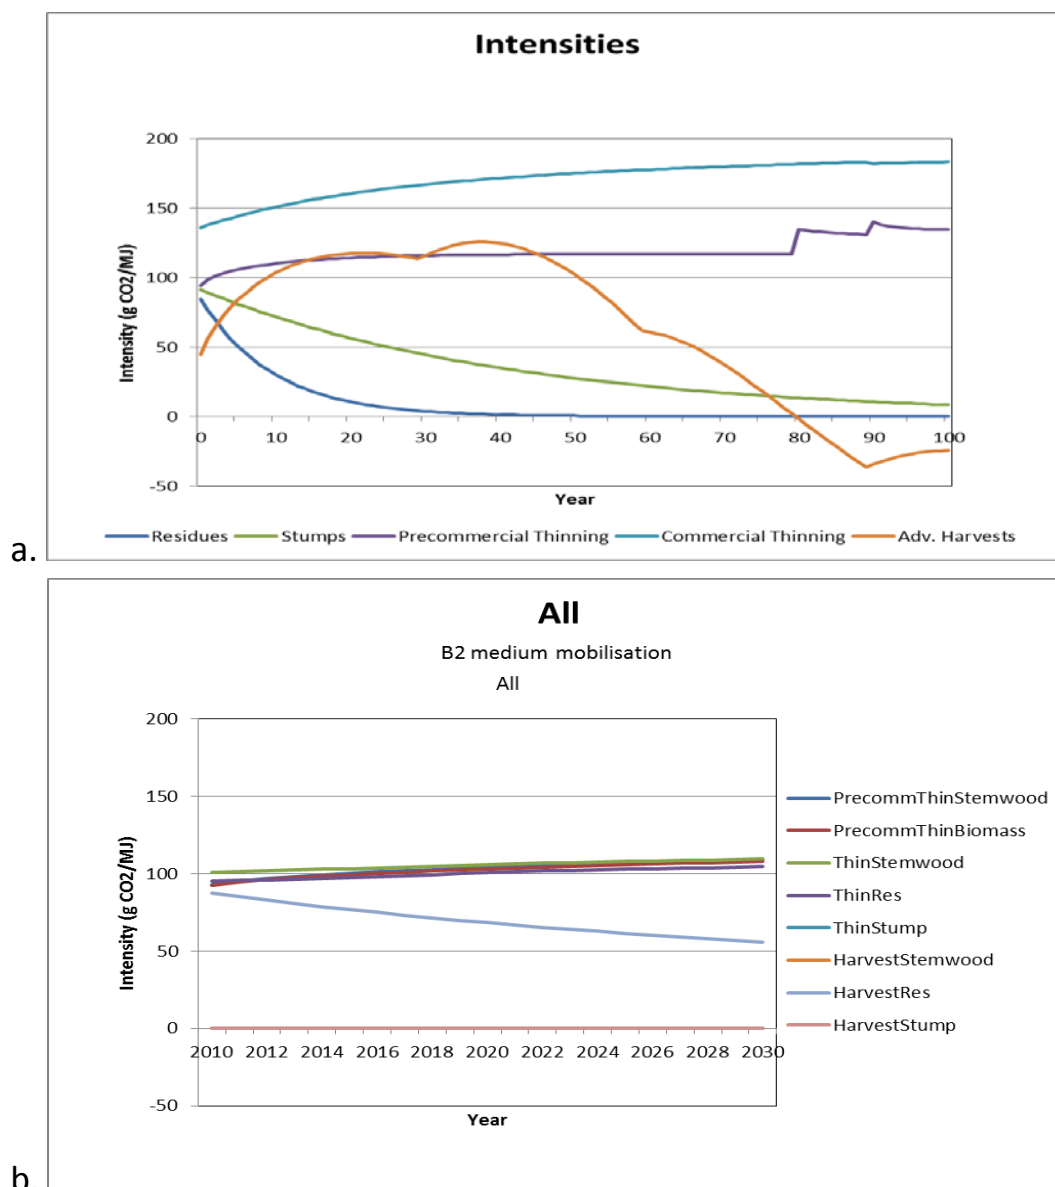

Note: Joanneum (2014) own elaboration; stumps and stemwood are purposely not considered in the B2 medium mobilization scenario. Their effective emission factors are not shown.

When the models are applied to a biomass supply scenario (Figure 8b), the emission factors are different than for the individual models because intensity of the scenario is calculated as the sum of emissions to a specific year divided by the sum of energy to the same year.

Table 7 *The effective greenhouse gas emission factors for a specific supply scenario (B2 Medium) by country*

Country	PrecommThin Stemwood	PrecommThin Biomass	Thin Stemwood	Thin Res	Thin Stump	Harvest Stemwood	Harvest Res	Harvest Stump
AT	109	109	149	150	0	89	65	0
BE	111	111	152	153	0	109	55	0
HR	108	108	149	150	0	101	36	0
CY	0	0	151	152	0	102	47	0
CR	109	109	149	150	0	90	61	0
DK	110	110	150	152	0	100	60	0
ES	108	108	149	150	0	90	50	0
FI	111	111	150	151	0	99	68	0
FR	109	110	150	151	0	101	46	0
DE	109	110	149	150	0	95	55	0
GR	0	0	151	152	0	104	43	0
HU	109	109	150	151	0	105	39	0
IE	115	115	154	156	0	108	61	0
IT	108	108	150	151	0	108	36	0
LV	139	139	158	160	0	49	53	0
LT	110	110	150	151	0	105	60	0
LU	115	115	157	158	0	59	42	0
MA	0	0	0	0	0	0	0	0
NL	109	108	150	151	0	100	51	0
PO	110	110	150	151	0	98	60	0
PT	110	110	152	153	0	103	38	0
RO	109	109	150	151	0	108	47	0
SK	110	111	151	151	0	105	53	0
SI	109	109	150	151	0	105	54	0
ES	108	108	149	150	0	90	50	0
SW	110	110	149	150	0	89	70	0
UK	110	111	151	151	0	102	55	0

Source: Joanneum Research calculations

Table 7 shows the effective emission factors by country for the different types of biomass. The general trend is that warmer countries have faster decay rates and hence lower emission factors from the use of residues. This was also suggested by Repo et al. (2011).

There are slight variations in the effective emission factors of other biomass sources too. For example, countries with longer rotation lengths have a lower emission factors from the use of harvest stemwood than do countries with shorter rotation period. This is because the typical current harvest delay is assumed to be 1/3 of the rotation period.

3.3 GHG Emission Factors for Using Forest Bioenergy

Based on the model calculations, the emission factors for woody bioenergy were determined for two key assumptions of the reference forest system for pre-commercial thinnings and residues from commercial thinnings:

- In the **optimistic forest reference case** it is assumed that this biomass would remain in the forest and decay, i.e. release CO₂ over time.
- In the **pessimistic forest reference case** it is assumed that this biomass would be taken out of the forest but used as feedstock for pulp & paper, and other low-quality wood use, i.e. without immediate CO₂ release.

Both cases were calculated for the 20 and 100 year time horizons. The respective emission factors are given in the following table.

Table 8 Forest Bioenergy GHG Emission Factors for C Stock Changes

Emission factor in g CO ₂ /MJ for	Pre-comm. thinning stemwood	Pre-comm. thinning residues	Thinning stemwood	Thinning residues	Harvest residues
20 a optimistic	3.6	3.6	116.0	3.0	3.0
20 a pessimistic	118.0	118.0	118.0	3.0	3.0
100 a (both cases)	0.2	0	0.1	0	0

Source: Joanneum Research calculation; note that emissions do not include supply chains or the emissions saved from the displaced fossil energy

4 Scenarios for Woody Bioenergy in the EU

In order to estimate the future use of sustainable bioenergy in Europe, three scenarios were modelled to determine how much bioenergy would be needed by 2020 and 2030⁹ for the different end-uses (i.e. electricity, heat, and transport) as well as the respective primary energy use, and GHG emissions.

The scenarios consist of the **reference (REF)**, a “**reduced GHG emissions**” (GHG) and a “**sustainable bioenergy**” (SUS) case.

The REF scenario is based on the most recent EC reference scenario (EC 2013), while for the other two scenarios, the EUwood study (Mantau et al. 2010; Verkerk et al. 2011b), results of the Biomass Futures project (IC et al. 2012), EFSOS II (UNECE, FAO 2011) as well as Teske et al. (2012) and GP, EREC, GWEC (2012) were considered (see details in Section 5 of the Annex report).

In the GHG and SUS scenarios, additional **cascading use of wood** was applied as a simplified strategy¹⁰ to increase sustainable wood use in buildings. The respective additional **sawmill** residues as well as improved recycling of woody material were considered accordingly.

4.1 The Reference (REF) Scenario


The REF scenario was built using the 2013 PRIMES reference scenario (EC 2013) for electricity and transport fuel demand and supply as well as end-energy and primary energy supply mix. Due to a lack of access to the PRIMES data for heat, the respective demand and supply were modeled using data from the reference case of the EC 2050 roadmap (EC 2011).

The assumed contributions of **non-biomass** renewables to the final energy demand is shown in the following figures.

⁹ Due to the lack of consistent projections for both the energy and agriculture/forest sector for 2050, only qualitative perspectives could be derived for this timeframe.

¹⁰ See e.g. Keegan et al. (2013); Sikkema et al. (2013).

Figure 9 Renewable Electricity Generation in the EC REF scenario for the EU27 from 2010-2030

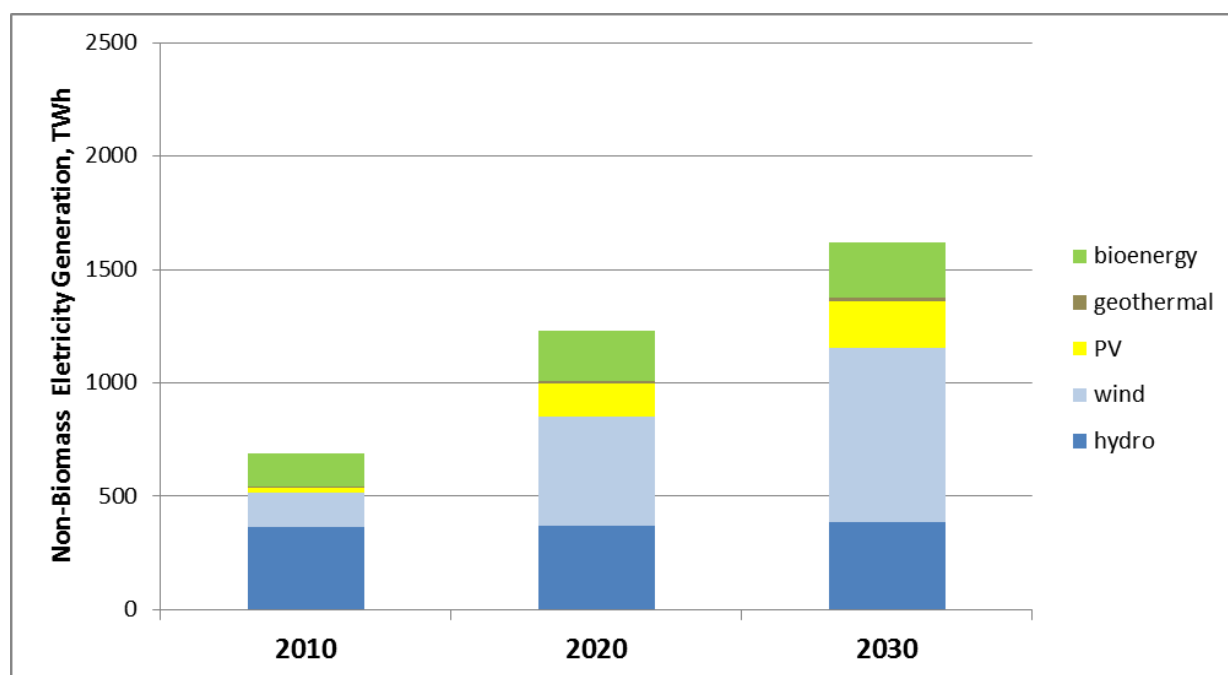


Source: IINAS calculation based on EC (2013)

REF assumes that electricity from non-biogenic renewables increases from 2010 to 2030 by a **factor of 2.3** while electricity from bioenergy increases by a factor of 1.7, with a rising share from woody bioenergy (see Section 5.1).

In the REF **heat** sector, geothermal and solar energy will gain significant shares until 2030, while biomass will increase only marginally (see Section 5.2). The non-bioenergy heat supply in REF is shown in the following figure.

Figure 10 Heat Supply in the EC REF Scenario for the EU27 from 2010-2030

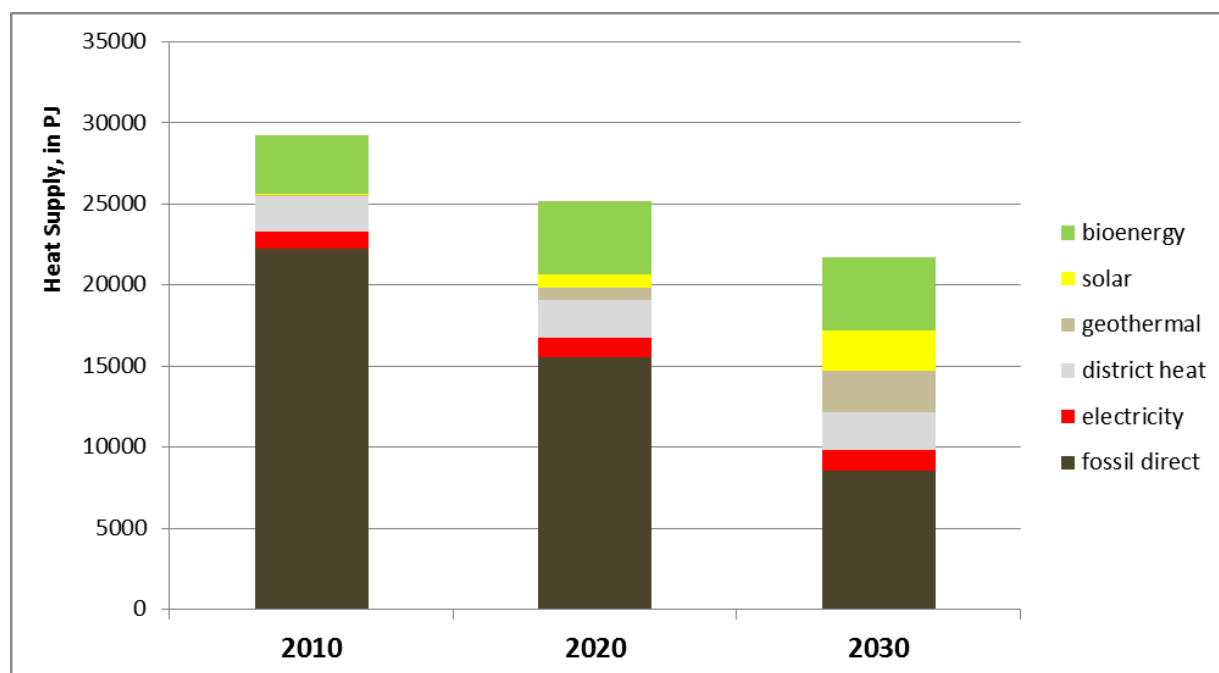

Source: IINAS calculation based on EC (2013). Note that electricity and district heat also come partially from renewables.

In the transport sector, the EC 2013 REF scenario assumes that the RED target of 10% renewable transport fuels by 2020 is met (with double-counting), and that the renewable transport share is increased slightly to 11% by 2030 (excluding multipliers), but only with a slight increase of biofuels share, as the (renewable) electricity share in transport increases far more.

The overall demand for biofuels in the REF scenario is assumed to nearly double by 2020 (compared to 2010), while remaining on this level by 2030.

As regards **wood resources**, the REF scenario by 2030 requires approx. 3700 PJ of woody bioenergy, mainly for electricity and heat (less than 10% for biofuels).

Of that, about 2400 PJ come from forests (30% of that from imports), and about 1300 PJ from woody residues, and SRC.

In particular, different types of feedstocks with different share over the time were assumed to be used. This scenario assumes that for bioelectricity the feedstocks used are wood chips and wood pellets from EU forest residues and EU woody residues as well as imported wood pellets, all of them increasing their contribution up to 2030. For bioheat, wood logs from EU forest residues (more than halving their contribution up to 2030), wood pellets from woody residues (increasing their contribution) and domestic SRC (small contribution) and imported wood pellets (increasing their contribution). For biofuels for transport,

it is mainly considered BtL from EU black liquor and BtL from imported forest residues (by 2030).

In addition, the domestic **non-energy** use of woody materials will be approx. 5100 PJ by 2030 (energy equivalent, see Section 5.2 in the Annex Report).

Thus, the **total woody biomass resource demand** in the REF scenario by 2030 – expressed in energy terms¹¹ - will be approx. 8800 PJ.

The high mobilization potential of EU woody biomass from forests - **without** any sustainability constraints - is about 7700 PJ (see Table 5b) plus approx. 2500 EJ of woody residues and SRC, i.e. a **total** of about 10000 PJ of woody biomass in the EU by 2030 (excluding post-consumer wood).

The EU domestic wood potential **alone** could theoretically supply the total EC REF demand for woody products by 2030 - but this would be significantly more costly than imported wood. Therefore, the REF scenario assumed that about 750 PJ of wood will be imported by 2030 which represents a **drastic increase** compared 2010 when woody bioenergy imports were in the order of 110 PJ.

4.2 The GHG Reduction (GHG) Scenario

In the GHG scenario, significantly improved energy efficiency measures were assumed based on recent studies¹² to achieve a 30% reduction of final energy demand by 2030 compared to the REF scenario, and a 22% reduction compared to 2010. This leads to **significantly reduced demands** for electricity, heat and transport fuels in all sectors.

These **very ambitious** targets to reduce final energy demand in all sectors are achievable, as they are based on detailed potential studies on the EU level¹³.

Next, the amount of renewables was increased using the mix given in the EC reference case, and taking into account the non-biomass renewable supply data given in Teske et al. (2012) to achieve renewable shares in final energy demand (including renewable electricity and district heat) of 25% by 2020, and of 45% by 2030, respectively.

Next, the use of woody bioenergy was changed, reflecting the aim to reduce the CO₂ emissions associated with forest C stock changes (see Section 3).

¹¹ Note that the non-energy wood demand expressed as an energy equivalent is based on the lower heating value of the wood, even if the wood is not used for energy.

¹² See ISI (2012a+b); OEKO (2011); Teske et al. (2012); GP, EREC, GWEC (2012)

¹³ See studies given in footnote 12.

For this, the use of forest products for bioenergy from EU forests was reduced by 25% compared to the REF scenario by 2030, and the use of imported forest products was reduced by nearly 80%. To balance this, the use of woody residues (mainly from sawmills) and from SRC was increased drastically, as these feedstocks have lower CO₂ emissions.

In the **electricity** sector, the woody bioenergy contribution by 2030 is reduced by 12% compared to the REF scenario, and woody bioenergy from EU forests and imports are decreased by about 14% and 62%, respectively.

In **heat** supply in 2030, EU forest products are reduced by 57% compared to REF, and imported woody biomass is completely phased-out. In parallel, use of EU woody residues and SRC increased accordingly.

In the **transport** sector, 1G biofuels - both domestic and imported - were nearly replaced by 2030 through 2G biofuel from domestic lignocellulose (mainly straw and black liquor) and all woody product imports are phased-out.

For bioelectricity the feedstocks used are wood chips and wood pellets from EU forest residues (decreasing their share in comparison with 2010) and EU woody residues (significantly increasing their contribution), wood chips from EU landscape care wood (with a minor contribution) as well as imported wood pellets (maintaining their contribution in levels comparable to those of 2010). For bioheat: wood logs from EU forest residues (with a relevant decreasing of their contribution), wood pellets from woody residues (significantly increasing their contribution) and domestic SRC (with a low contribution) and imported wood pellets (increasing their contribution). For biofuels for transport, it is mainly considered BtL from EU black liquor and BtL from forest residues, both of them significantly increasing up to 2030.

A key additional assumption of the GHG scenario is to mobilize **sustainable stemwood** from EU forests for increased **cascading use**. For this, additional wood use in 2.5% of new residential buildings in the EU by 2020 (increasing to 5% by 2030) was assumed which leads to a substitution of concrete and steel as construction materials, and also increases the amount of sawmill residues.

The additional stemwood demand from this increase in material use of wood represents 17 Mt of roundwood (about 34 Mm³) by 2020 which would increase to 67 Mt (about 134 Mm³) by 2030, and would displace some 8 Mt of concrete and 3 Mt of steel by 2020, and some 33 Mt of concrete and 13 Mt of steel by 2030, respectively.

The additional roundwood demand represents an energy equivalent of approx. 310 PJ by 2020, and 1250 PJ by 2030, respectively.

The **sustainable low-mobilization** potential for stemwood from thinnings and final harvest represents approx. 4500 PJ (see Table 5b). The wood demand for **material use** represents about 5000 PJ (see Section 5.2 in the Annex Report), of which about 1000 PJ are used for pulp & paper production, i.e. approx. 20% of industrial wood use. It is assumed that **increased cascading use** of wood for paper and packaging could achieve a 50% reduction of fresh fiber needs by 2030 and 20% of low-quality material wood use (for short-live building materials, and furniture) could be re-used so that an equivalent of 500 PJ of woody material previously used for fiber and some 500 PJ of low-quality wood uses can be mobilized by 2030 with cascading technologies in the European wood-using industries. Thus, a potential sustainable supply of 5500 PJ of domestic EU wood products would be able to meet the (reduced) material demand of 4000 PJ, leaving approx. **1500 PJ for bioenergy use**. Furthermore, the additional wood for building materials will provide some 100 PJ (by 2020) and 380 PJ (by 2030) of sawmill residues which can be used for bioenergy.

Finally, post-consumer wood is assumed to be increasingly recycled for energy which would provide some 1200 PJ by 2030.

The available domestic woody bioenergy potential in the GHG scenario is thus about 1500 PJ from EU forests (approx. 170 Mm³), and about 3800 PJ from residues, wastes and SRC, i.e. a total of 5300 PJ.

The woody bioenergy demand in the GHG scenario would reach about the same level (5300 PJ by 2030) and would be supplied by the domestic potentials plus a minor amount of imported wood pellets (around 160 PJ), i.e. the import demand for woody bioenergy could be reduced by nearly 80% compared to REF.

In parallel, use of EU **non-woody bioenergy** would increase: about 630 PJ of straw for biogas and biofuels and 550 PJ of manure for biogas would be mobilized by 2030, a nearly 3-fold increase compared to the REF scenario.

4.3 The Sustainability (SUS) Scenario

In the SUS scenario, the same demand levels for electricity, heat and transport fuels as in the GHG scenario are assumed, but the use of woody bioenergy is changed not only to reduce the CO₂ emissions associated with forest C stock changes (see Section 3), but also to **reduce biodiversity risks associated with EU bioenergy and respected imports** - both for wood and (biofuel) crops.

For this, the use of forest products for bioenergy from EU forests was reduced by 74% compared to the REF scenario by 2030, and **no imported** forest products are used. To balance this, the use of woody residues (mainly from sawmills) and from

SRC was increased to about the same level as in the GHG scenario, and **additional EU non-woody** bioenergy from agricultural residues and wastes was assumed to be mobilized more than in the GHG scenario.

In the **electricity** sector, forest bioenergy by 2030 is nearly phased out (94% reduction vs. REF) and use of woody residues and wastes more than halved. To compensate for this reduction, **non-woody bioenergy** use increases about 3.6-fold compared to REF.

In **heat** supply in 2030, EU forest products are again nearly phased out. In parallel, use of EU woody residues and SRC increases accordingly.

In the **transport** sector, 1G biofuels - both domestic and imported - are fully phased-out by 2030 through 2G biofuel from domestic lignocellulose (mainly straw and black liquor) and **no biofuel imports** are assumed.

For bioelectricity the feedstocks used are wood chips and wood pellets from EU forest residues (dramatically decreasing the total amount consumed from 2010 to 2030), EU woody residues (almost a constant total amount consumed from 2010 to 2030), wood chips from EU landscape care (significantly increasing from 2010 to 2030) and a decreasing amount of wood imported wood pellets (0 % in 2030). For bioheat, wood logs from EU forest residues (with a dramatic reduction up to 2030), wood pellets from woody residues (increasing its share up to 2030) and domestic SRC (increasing its share in comparison to 2010) and imported wood pellets (0 in 2030). For biofuels for transport, it is considered an increasing contribution of BtL from EU black liquor and BtL from domestic forest residues.

As in the GHG scenario, **sustainable stemwood** from EU forests is increased through **cascading use**. For this, additional wood use in 2.5% of new residential buildings in the EU by 2020 (increasing to 5% by 2030) was assumed which leads to a substitution of concrete and steel as construction materials, and also increases sawmill residues (same assumptions as in the GHG scenario).

The SUS scenario also shifts post-consumer organic wastes: incineration is phased out, and biowastes used more efficiently in decentral cogeneration plants¹⁴.

In summary, SUS reduces demand for EU forest products to 400 PJ (below 50 Mm³) which is 76% less than in REF, and uses about 3900 PJ of domestic woody

¹⁴ This requires a better "back end", i.e. improved selective collection of biomass wastes: the solid bio-waste components are to be collected separately and chipped, while the organic (green) components are also collected separately and used for biogas, and the digestate is then composted.

residues and wastes plus a small amount (140 PJ) of SRC. In parallel, some 1500 PJ of domestic straw plus 1550 PJ of manure are used for bioenergy.

4.4 Summary of the Scenarios

The qualitative description of the scenarios is given in the following table.

Table 9 Scenario Description

	Reference Scenario (REF)	Climate Scenario (GHG)	Sustainability Scenario (SUS)
Storyline	“Unrestricted” woody bioenergy use	Reduce GHG emissions, including those from bioenergy	Reduce GHG emissions, avoid biodiversity risks from imports and in domestic forests
Wood material demand	+ 4 % in 2020; + 10% in 2030	same as REF, but includes more EU construction wood (5% of new buildings by 2020 and 10% by 2030 use wood)	same as GHG, plus intensified cascading of woody materials for energy; wood bioenergy demand reduced by more non-woody bioenergy use
Technologies	Co-firing of imported pellets, and 1 st G biofuels (also imports)	Co-firing of (imported) pellets, no 1 st G biofuels by 2030	No co-firing by 2030, no 1 st G biofuels by 2030, more decentral bioenergy use
Imports	market driven (increase)	Low biofuel imports, reduces wood imports by 50% by 2030	No imports of wood and biofuels by 2030

Source: IINAS compilation

5 Scenario Results

The results of the scenario calculations are summarized in the following figures. The respective tables are included in Section 5 of the Annex Report.

The summary begins with the sectoral end-use demands for electricity (Section 5.1), heat (Section 5.2) and transport fuels (Section 5.3), and the respective supply from bioenergy, other renewables, and non-renewable energy carriers.


From the total final energy demand and supply (Section 5.4), the primary energy demand is calculated (Section 5.5), as well as the respective GHG emissions from bioenergy (Section 5.6) and those from overall primary energy (Section 5.7).

5.1 Electricity Generation

Total electricity generation in 2010 was 3410 TWh, and would remain stable by 2020 and increase to 2650 TWh by 2030 in the REF scenario. In the GHG and SUS scenarios it could be reduced by efficiency measures to 3290 TWh by 2020 and to 3320 TWh by 2030, respectively, as illustrated in Figure 11.

In 2020, the share of woody bioenergy will remain at 5 % in the REF and GHG scenarios, while in SUS it will be 4 %. By 2030, the woody bioenergy share in REF remains at 5% while in the GHG scenario it is reduced to 4.9% and in the SUS scenario, only 0.8% of the electricity would come from woody bioenergy, but with a growing contribution of non-woody bioenergy.

Figure 11 Electricity Generation in the EU27 from 2010-2030

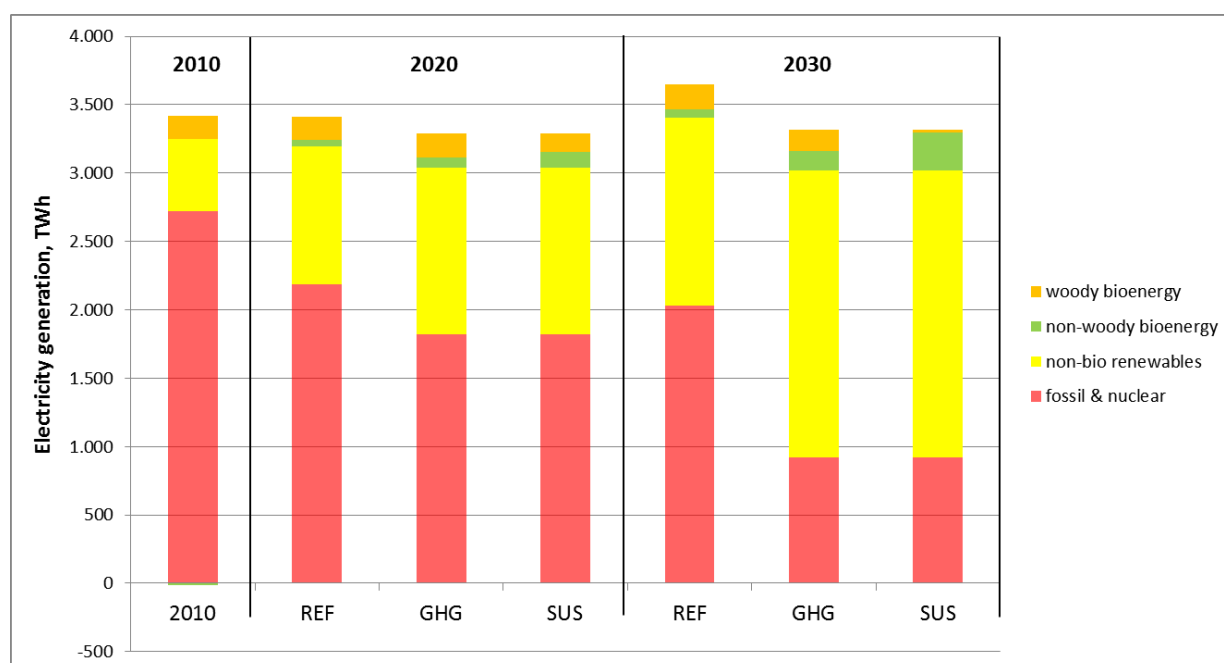

Source: IINAS calculations; woody bioenergy includes forest and non-forest bioenergy; non-woody bioenergy includes biogas and liquid biofuels

The most relevant difference between the REF, GHG and SUS scenarios is the origin of woody bioenergy used for electricity:

In the REF scenario, imported woody bioenergy is increasingly used for electricity generation, rising from about 100 PJ to 650 PJ in 2020, and is then reduced to 430 PJ in 2030. In the GHG scenario, imported wood pellets increase to only 230 PJ by 2020, and then are reduced to some 160 PJ in 2030.

In the SUS scenario, non-woody (domestic) bioenergy replaces a high share of the imported wood pellets, and woody bioenergy mainly is sourced from EU wood residues and wastes, not from forests. Also, SRC contribute to replacing pellet

imports, but on a rather low level (approx. 140 PJ). By 2030, woody bioenergy imports are **completely phased-out**.

5.2 Heat Production

The first difference between the REF and the GHG/SUS scenarios for heat are the demand level: while in REF heat demand in 2020 increases by more than 10% compared to 2010, and remains higher than in 2010 even in 2030 (9%), the GHG and SUS scenarios assume far stricter demand-side efficiency measures which lead, compared to 2010, to a very light increase of demand in 2020 (<1%) and a net reduction of 9% by 2030, respectively.


The second difference is the more prominent use of non-bioenergy renewables for heat in the GHG and SUS scenarios: solar and geothermal heat increase from less than 150 PJ in 2010 to 1550 PJ by 2020 and 5000 PJ by 2030. The REF scenario assumes 3500 PJ by 2030.

The other difference is again the source of wood for bioenergy: in the REF scenario, EU forest products supply the major share, while residues and wastes are about only 1/3 of total woody bioenergy. In the GHG and SUS scenarios, forest products are reduced through increased sourcing of residues and wastes (see Figure 12).

In the SUS scenario, EU forest product use is reduced by 94% compared to 2010 and replaced by domestic woody pellets from residues, wastes and SRC.

In all scenarios, direct wood heating relies on domestic sources, i.e. no imported pellets are used.

Figure 12 Final Energy Supply for Heat in the EU27 from 2010-2030

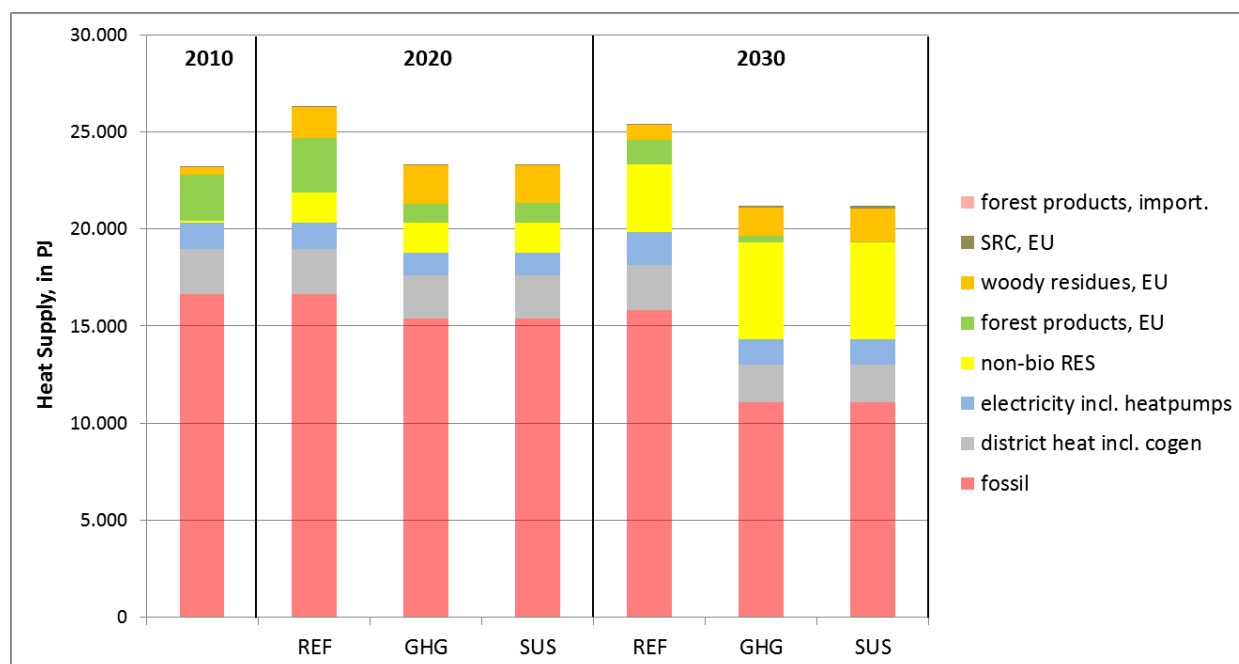

Source: IINAS calculations; here, forest products include all biomass extracted directly from forests (e.g. roundwood, thinning and harvest residues); woody residues include secondary and tertiary residues and wastes from wood industry, and post-consumer wood; SRC is short-rotation coppices; non-bio RES = non-biogenic renewables

It should be noted that there is also “indirect” bioenergy included in the electricity and cogenerated heat segments of the final heating supply (for detailed data see Annex Report).

5.3 Transport Fuels

In transport, the final energy demand in the REF scenario will decrease from about 16 EJ in 2010 to 15 EJ by 2020 and remain there by 2030, as shown in Figure 13.

In the GHG and SUS scenarios, transport fuel demand can be reduced to 12 EJ by 2020 and 9 EJ by 2030, respectively. This is a consequence of the assumed massive increase in efficiency of road transport, and modal shifts, and not connected to biofuels.

In REF, the contribution of renewables (including electricity) will increase from 4.2 % in 2010 to 8.9 % by 2020 and 11% by 2030, not considering double-counting or multipliers for electricity.


In REF, the contribution of biofuels and woody bioenergy in 2020 will reach 7.3% and 0.4%, respectively, and in 2030 the shares will be 7.7% and 2.1%, respectively.

In the GHG and SUS scenarios, biofuels and woody bioenergy will contribute in 2020 with 7.5% and 1.4% - 1.7%, respectively, and in 2030 with 8.4% and 6.7% - 6.1%, respectively.

The bioethanol and biodiesel **shares** will be the same in all scenarios, but the role of advanced conversion and the origin of the feedstocks are different:

In the REF scenario, 1G biofuels will still dominate in 2030, and imports will contribute about 30% of total biofuels. In the GHG and SUS scenarios, all 1G biofuels are phased-out by 2030 with the exception of a small share of sugarcane EtOH from Brazil in the GHG scenario. For biodiesel, the key resources will be black liquor and woody residues, while for bioethanol, domestic straw will become the dominant source.

Figure 13 Final Energy Supply for Transport in the EU27 from 2010-2030

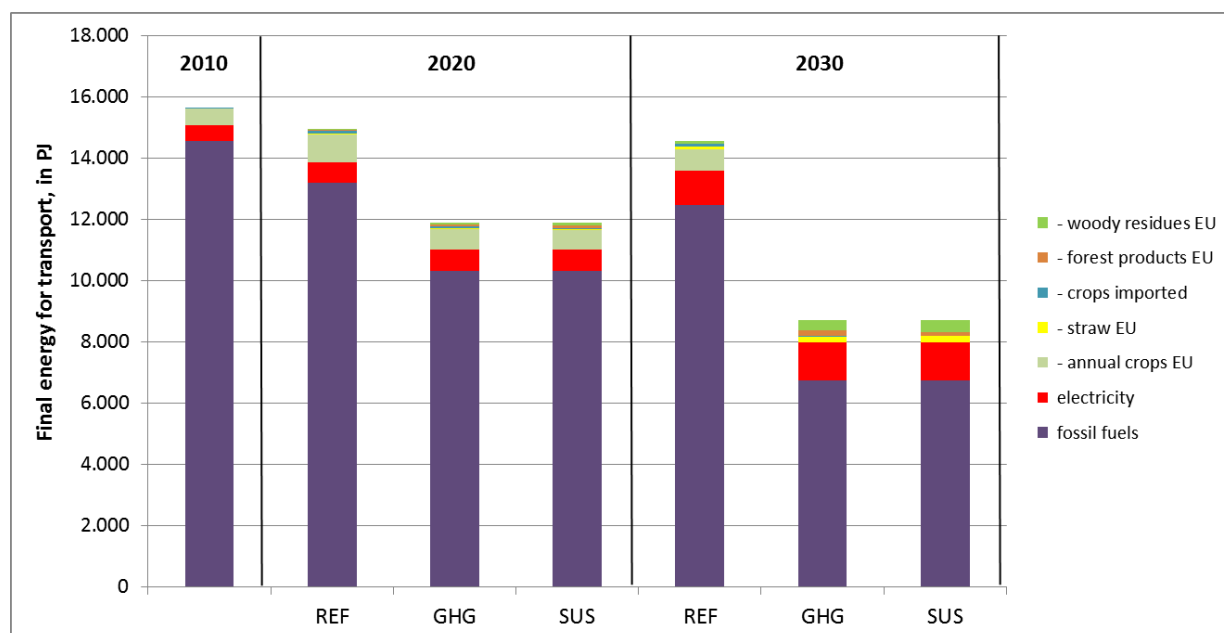

Source: IINAS calculations; here, forest products include all biomass extracted directly from forests (e.g. roundwood, thinning and harvest residues); woody residues include secondary and tertiary residues and wastes from wood industry, and post-consumer wood

5.4 Final Energy Demand

In the REF scenario, the final energy demand will decrease from about 51 EJ in 2010 to 48 EJ by 2020 and will reach 50 EJ again by 2030, with shares of all renewables (including electricity and cogenerated heat from renewables) increasing from 13% in 2010 to 20% by 2020 and 27% by 2030, respectively.


In the GHG and SUS scenarios, final energy demand will be reduced due to the assumed massive investments in energy efficiency to 42.5 EJ in 2020 and 37 EJ in

2030 (see Figure 14). The total renewable share will increase to 25% by 2020, and to 48% by 2030, respectively.

The woody bioenergy shares in the REF scenario will decrease slightly from 8% in 2010 to 7% by 2020, and will remain there by 2030.

In the GHG and SUS scenarios, the shares will remain at the 2010 level (except in GHG scenario in 2030 where it reaches 10%).

Figure 14 Final Energy Demand in the EU27 from 2010 to 2030

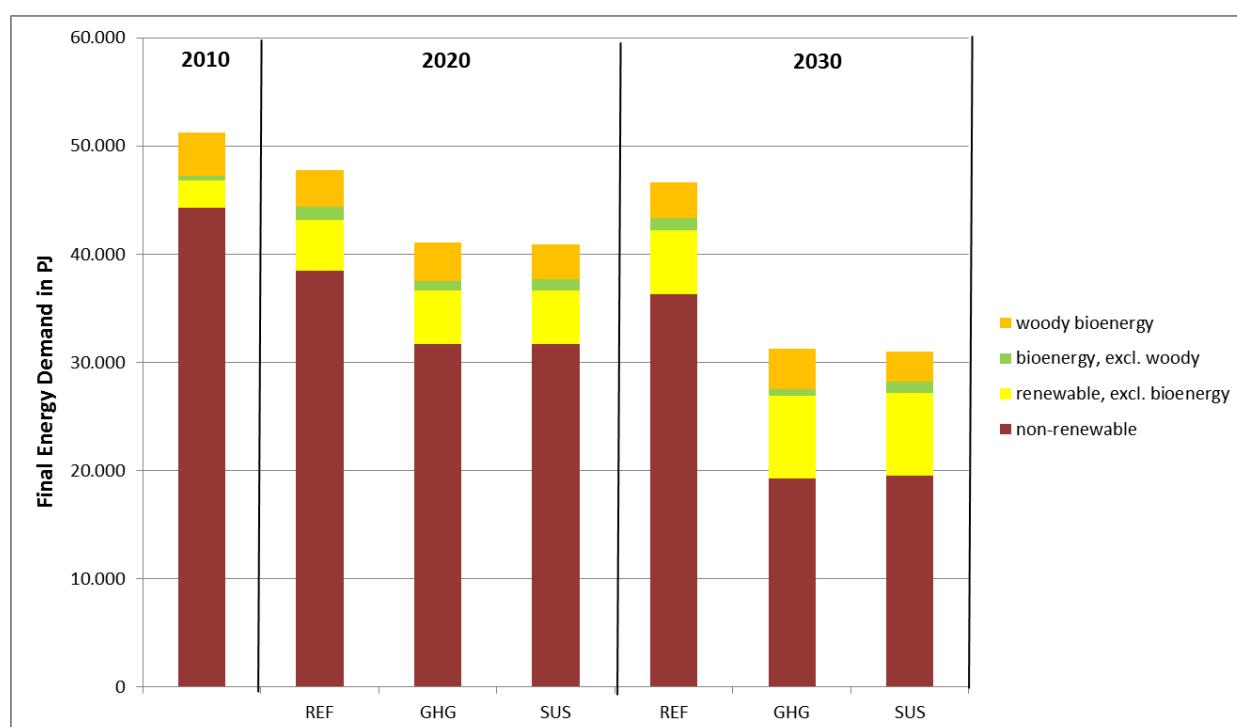

Source: IINAS calculations; shares from electricity and cogenerated heat are included in the categories

5.5 Primary Energy Supply


Primary energy supply in the EU27 in 2010 was about 71 EJ, and will be reduced in the REF scenario to about 69 EJ by 2020 and 67 EJ by 2030, respectively.

In the GHG and SUS scenarios, the primary energy supply will be reduced to 64 EJ by 2020 and 45 EJ by 2030, respectively.

As depicted in Figure 15, primary energy supply in the GHG and SUS scenarios will be reduced by nearly 40 % by 2030, compared to 2010, while the REF scenario achieves only a 6% reduction.

Woody bioenergy contributed 7% in 2010, and could reach 7% (REF + SUS) to 8% (GHG) by 2020 and 4% (REF), 10% (GHG) and 7% (SUS) by 2030.


Figure 15 Primary Energy Supply in the EU27 from 2010-2030

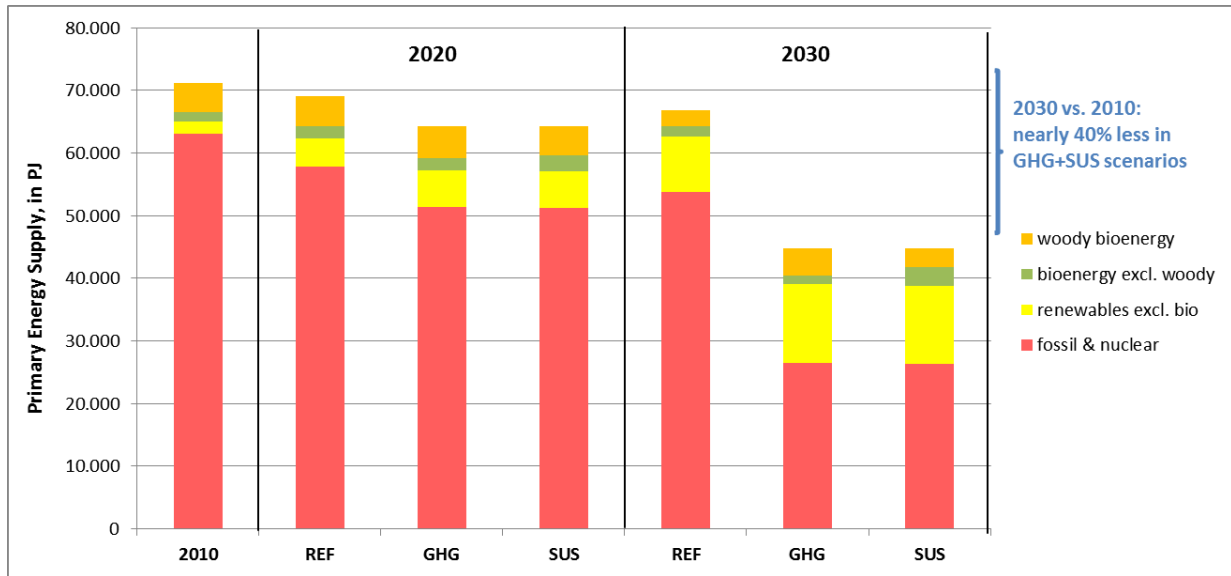

Source: IINAS calculations


The total amount of primary woody bioenergy varies between the scenarios, as reflected in Figure 16 and 17, but contributions of the various bioenergy sources, and their use for electricity, heat and transport fuels shows even more significant differences between the scenarios.

Figure 16 Primary Woody Bioenergy in the EU27 from 2010-2030 by source

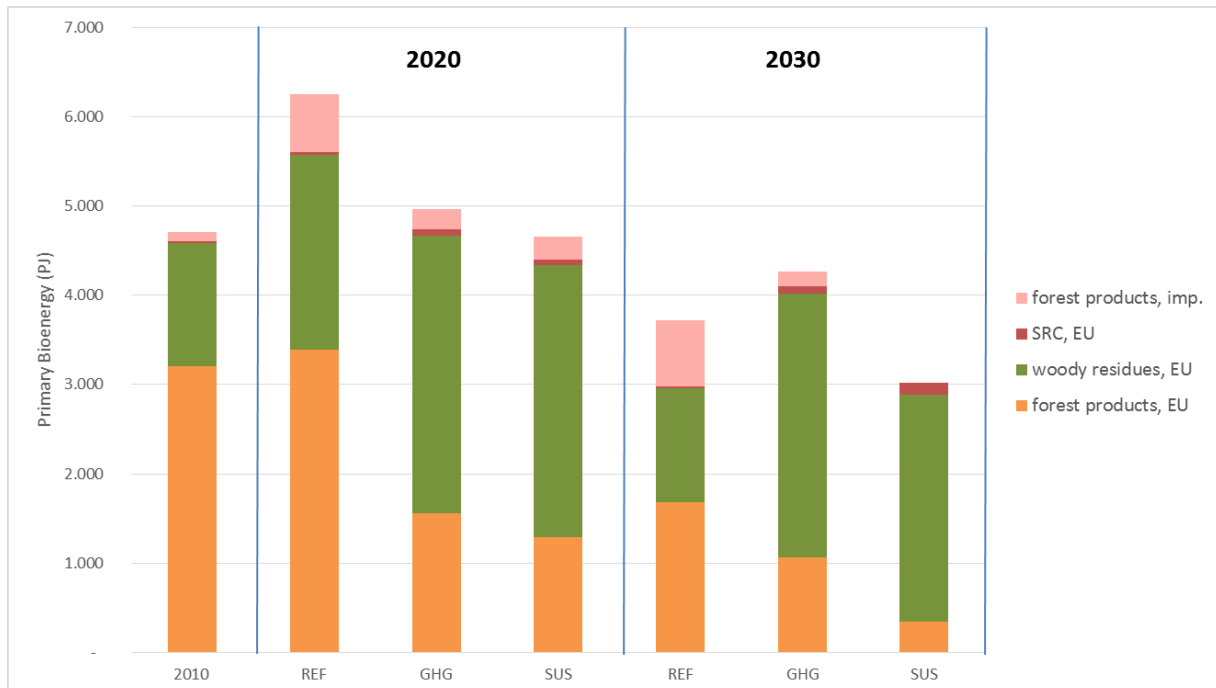

Source: IINAS calculations

Figure 17 Primary Woody Bioenergy in the EU27 from 2010-2030 per Sector

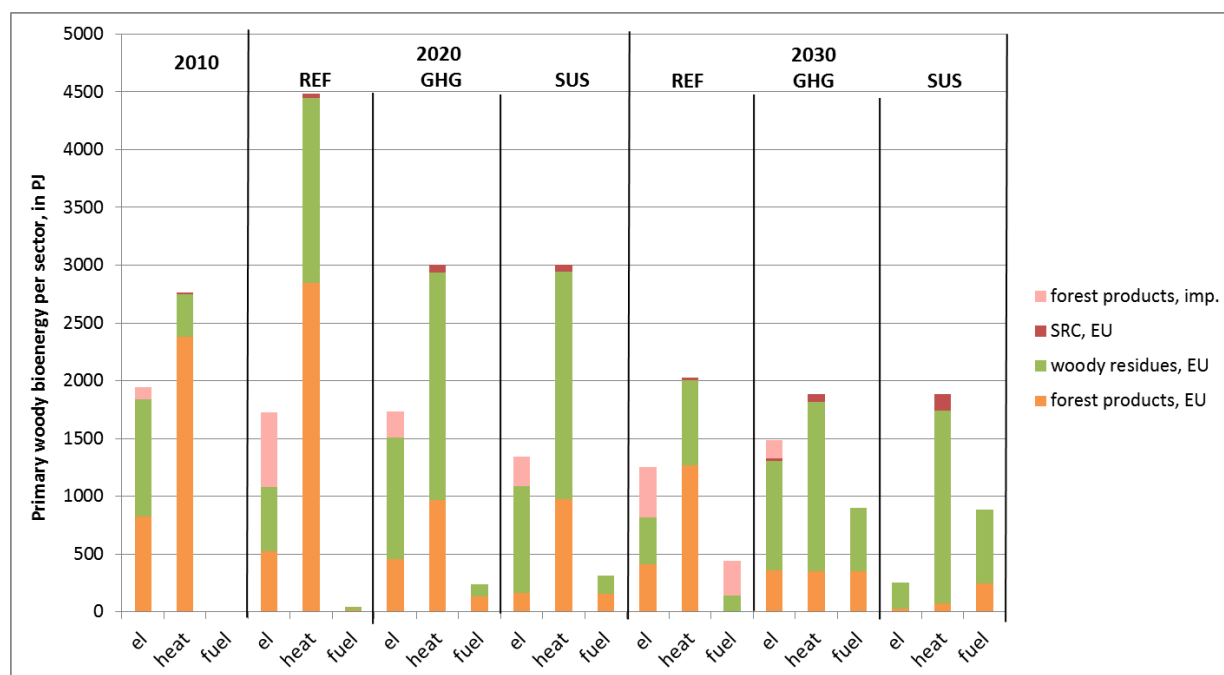

Source: IINAS calculations

The use of woody biomass – including non-energy uses – and the respective potentials are shown in the following table.

Table 10 Bioenergy Demand and Potentials in the EU27 from 2010-2030

Biomass, energy equiv. [PJ]	2010	2020			2030		
		REF	GHG	SUS	REF	GHG	SUS
forest products, EU for non-energy	4000	4200	3750	3500	5100	4000	4000
forest products, EU for bioenergy	3204	3387	1554	1291	1682	1058	345
total forest products, EU	7204	7587	5304	4791	6782	5058	4345
share of potential (excl. imports)	91%	95%	97%	94%	89%	82%	71%
woody residues/wastes EU, for energy	1384	2185	3119	3049	1276	2960	2539
share of potential	45%	78%	70%	68%	64%	82%	70%
SRC in EU, for bioenergy	14	34	68	60	25	87	141
share of potential	3%	4%	4%	4%	10%	44%	72%
straw to biogas + biofuels	8	57	93	421	217	633	1553
used share of straw potential	0%	3%	4%	20%	11%	32%	76%
manure to biogas, for bioenergy	108	216	260	450	373	546	1567
used share of manure potential	6%	11%	13%	23%	19%	26%	75%

Source: IINAS calculations

This table clearly illustrates that the GHG and SUS scenarios can reduce both the demand on EU forest products, and for imports. In parallel, the use of agricultural residues and wastes will increase significantly above the REF levels.

5.6 GHG Emissions from Bioenergy

The GHG emissions from all bioenergy systems were calculated using GEMIS life-cycle emission factors, as given in the Annex Report (Table 17 in Section 4.5).

For bioenergy systems using forest biomass, also the CO₂ emissions from forest C stock changes were included which depend on time horizon (20 or 100 years), and optimistic or pessimistic forest reference case (see Table 3 in Section 3.3).

The overall balance further takes into account GHG emission savings from substituting construction materials with wood (see Table 20 in Section 4.6 of the Annex report) which is part of the GHG and SUS scenarios.

Note that these balances do not take into account the GHG emissions of fossil energy systems - this will be considered in the next section.

The GHG and SUS scenarios do reduce the biogenic emissions compared to those of the REF scenario, both for 2020 and 2030.

The most relevant reductions are for bio-electricity, and through the substitution of non-renewable construction materials with wood.

In the SUS scenario, the substitution effect from woody construction materials **alone** is nearly as large as the total biogenic GHG emissions so that this scenario can nearly achieve full carbon neutrality, i.e. nearly **zero net GHG emissions** by 2030.

Figure 18 GHG Emissions from Woody Bioenergy 2010 - 2030 (20 Year Time Horizon)

a) pessimistic forest reference case




b) optimistic forest reference case



Source: IINAS calculations using GEMIS life-cycle emissions and forest C stock change emission factors from Joanneum Research

The same pattern can be observed for the GHG emissions using a 100-year time horizon (see Figure 19).


Figure 19 GHG Emissions from Woody Bioenergy 2010 - 2030 (100 Year Time Horizon)

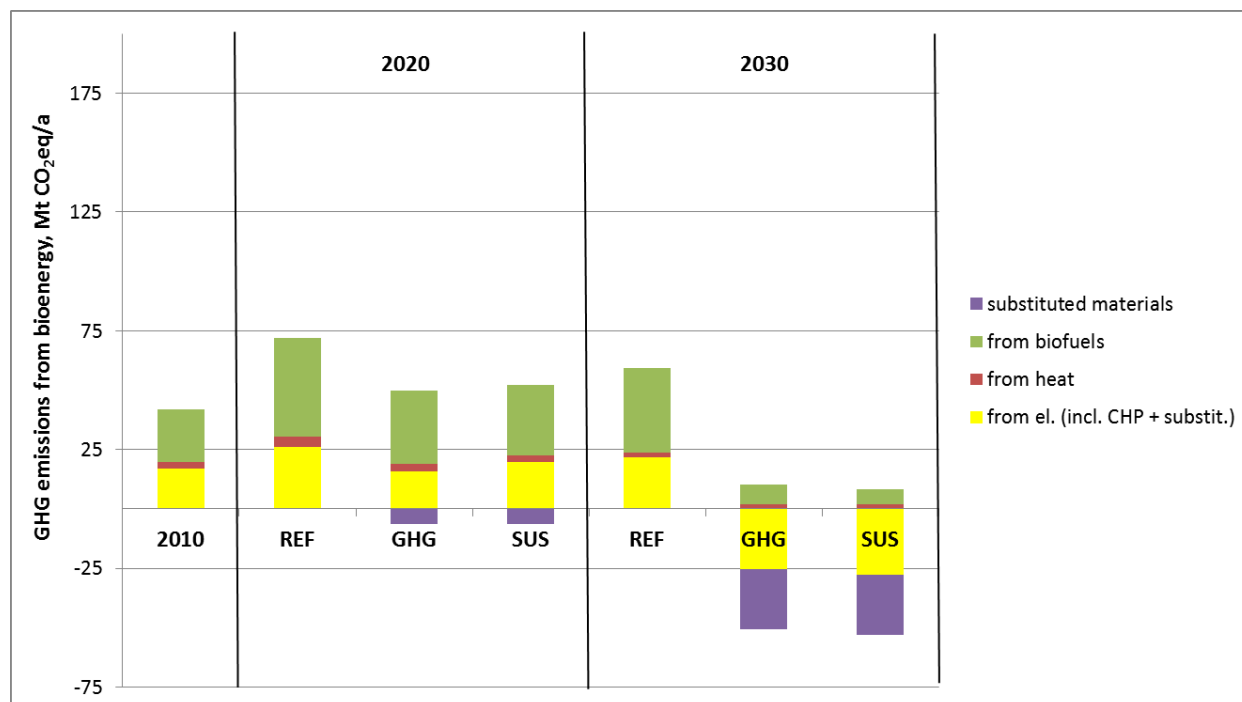

Source: IINAS calculations using GEMIS life-cycle emissions and forest C stock change emission factors from Joanneum Research; for the 100 year time horizon, the results are independent from the pessimistic or optimistic reference scenario

In Figure 20, the GHG emissions from bioenergy are again shown for the totals and the assumed time horizon and forest references cases.

Figure 20 GHG Emissions from Woody Bioenergy 2010 - 2030 Depending on Time Horizons and Forest Reference Cases

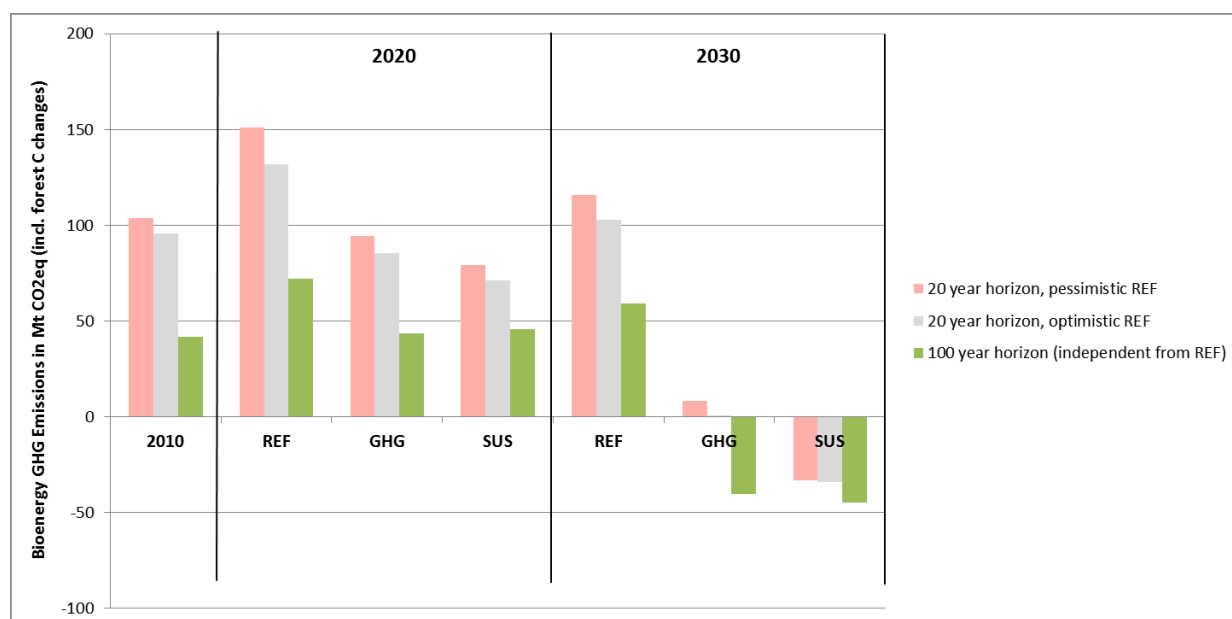

Source: IINAS calculations using GEMIS life-cycle emissions and forest C stock change emission factors from Joanneum Research; for the 100 year time horizon, the results are independent from the pessimistic or optimistic reference scenario

This clearly shows that the **GHG and SUS scenarios do reduce the overall GHG emissions from bioenergy** compared to the REF scenario, whatever the time horizon of the GHG accounting, and disregarding which forest reference case is chosen.


For the optimistic forest reference and 20 year and 100 year time horizons, the GHG and SUS scenarios achieve **more** than full carbon neutrality, i.e. **net GHG emission reductions** by 2030.

5.7 Overall GHG Emissions from Energy Supply and Use

To complete the GHG emission balance, the emissions from the non-biogenic energy systems must be factored in. For this, the life-cycle GHG emissions for all other energy systems were also taken from the GEMIS model: the fossil and nuclear systems (see Annex Report Table 18 in Section 4.6) and the non-bio-renewable electricity systems (Annex Report Table 19 in Section 4.6) also contribute to the overall GHG emissions of the EU energy system.

The overall GHG emission balance of the total EU energy system is shown in the following figures, again differentiating between the 20 and 100 year time horizons for the forest bioenergy systems, and the optimistic and pessimistic forest reference case.

Figure 21 *Life-Cycle GHG Emissions from Energy Supply and Use in the EU27 from 2010-2030 with GHG Emissions from Forest Bioenergy for 20 Year Time Horizon and Optimistic Forest Reference Case*

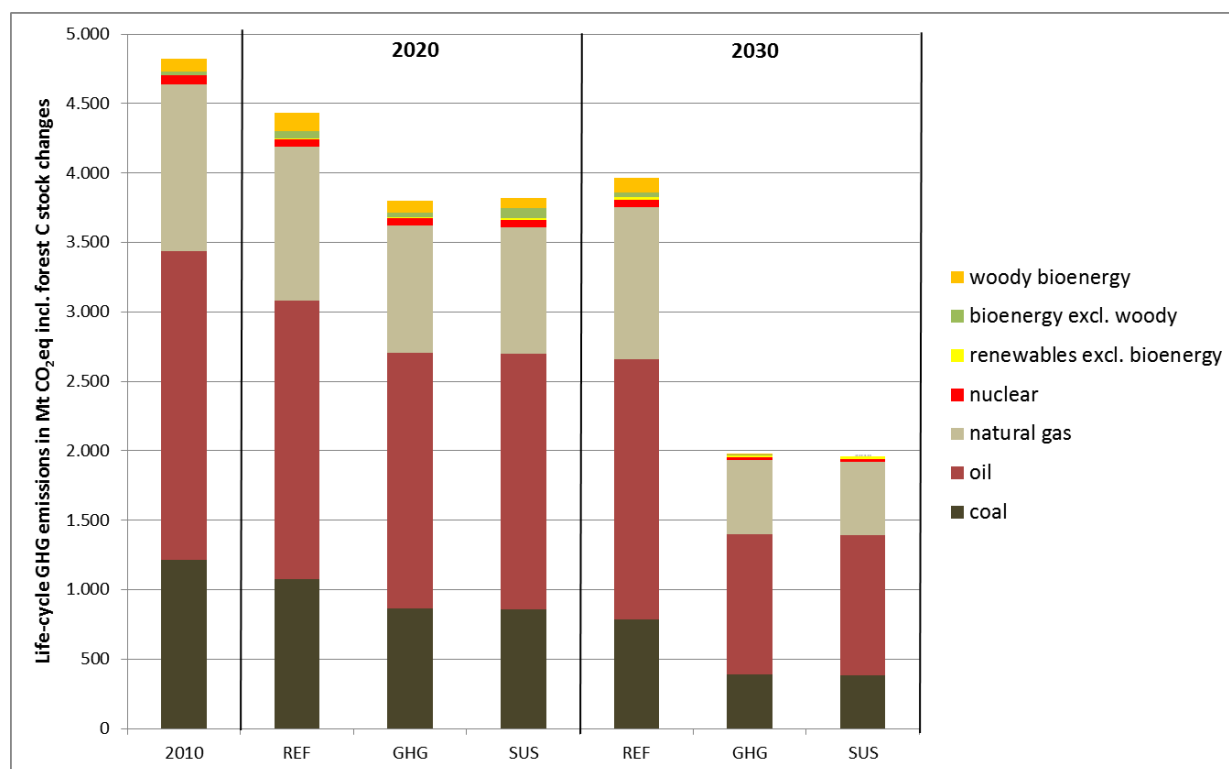


Source: IINAS calculations; data include upstream life-cycle GHG emissions for all energy, and GHG emissions from forest bioenergy using a 20 year time horizon and optimistic forest reference case

The overall GHG emission balance clearly indicates that the biogenic GHG emissions are rather small, compared to the emissions from the remaining fossil fuels. Also the GHG emissions from non-bio-renewables are very small.

These results do not change if a pessimistic forest reference case is assumed for the forest bioenergy, as shown in the following figure.


Figure 22 *Life-Cycle GHG Emissions from Energy Supply and Use in the EU27 from 2010-2030 with GHG Emissions from Forest Bioenergy for 20 Year Time Horizon and Pessimistic Forest Reference Case*

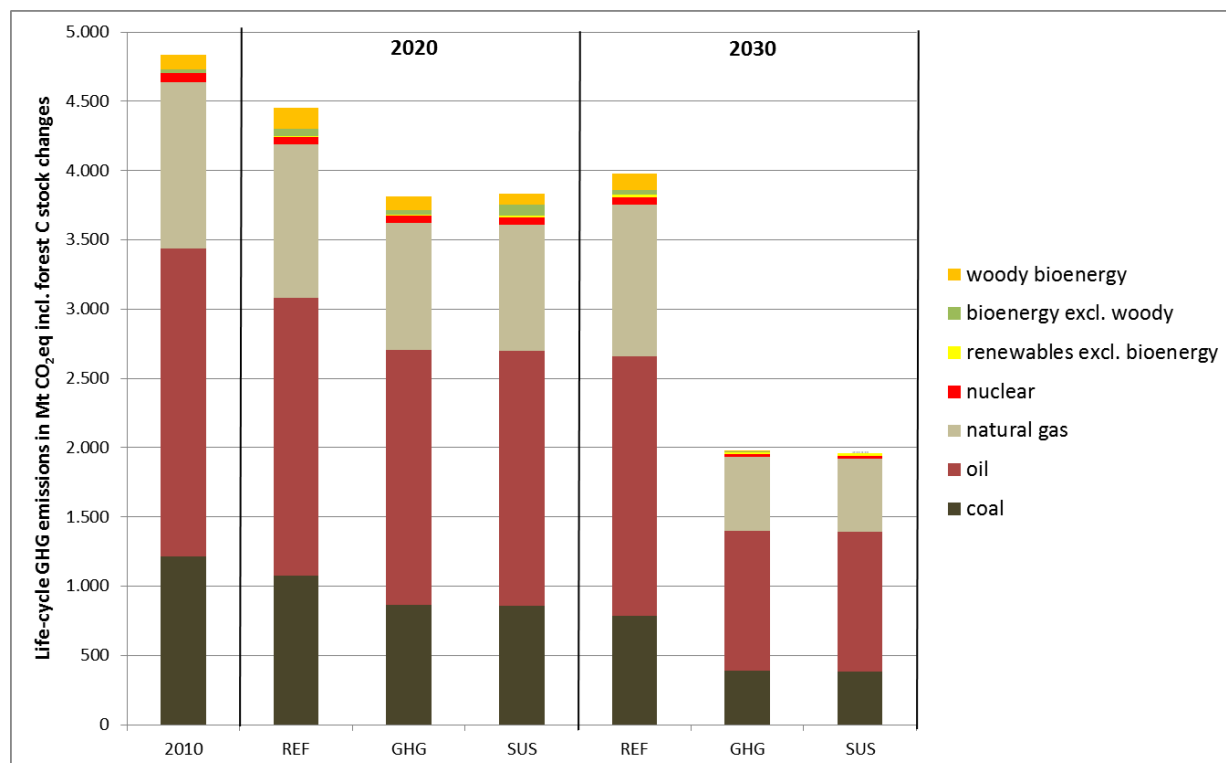

Source: IINAS calculations; data include upstream life-cycle GHG emissions for all energy, and GHG emissions from forest bioenergy using a 20 year time horizon and pessimistic forest reference case

The differences between the results for the 20-year time horizon and the ones for the 100 year time horizon (see following figure) are also quite small - this shows that the discussion of the “carbon debt” associated with forest bioenergy becomes **insignificant if sustainable and low-C options** for forest bioenergy are used.

Figure 23 Life-Cycle GHG Emissions from Energy Supply and Use in the EU27 from 2010-2030 with GHG Emissions from Forest Bioenergy for 100 Year Time Horizon

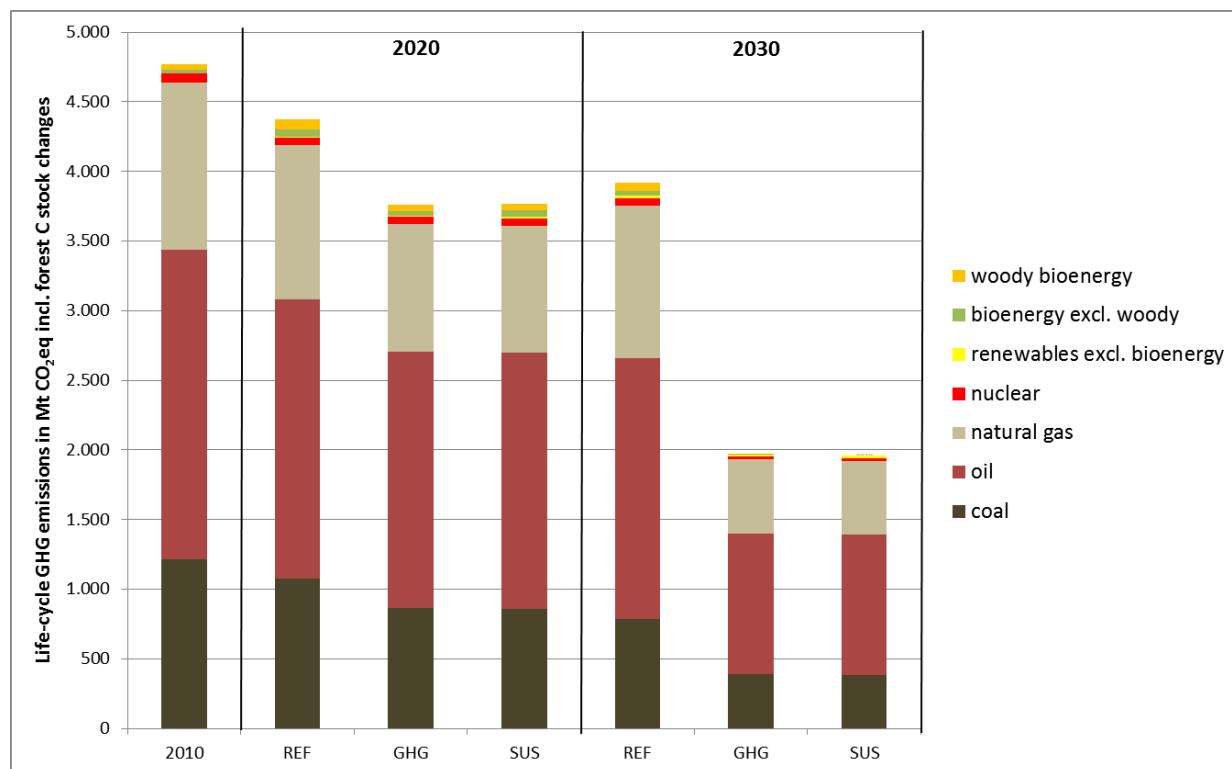

Source: IINAS calculations; data include upstream life-cycle GHG emissions for all energy, and GHG emissions from forest bioenergy using a 100 year time horizon (results are independent from forest reference case)

For the 100 year time horizon, the net GHG emissions from woody bioenergy in the GHG and SUS scenarios are **less than zero** due to the substitution effect from cogeneration and use of woody construction material.

The remaining fossil fuels dominate the GHG emission balance, with still high contributions from oil, while emissions from coal are reduced significantly, and natural gas is in between.

It should be noted that for oil and gas, the GHG emission factors used here do not reflect potential future contributions from “unconventional” sources such as tar sands, or shale gas **which have higher GHG emissions**.

Furthermore, the GHG balances include emissions from outside of the EU (“upstream” parts of imported energy life-cycles) so that the results cannot be compared directly to the EU GHG emission reporting which is based on a territorial concept.

6 Conclusions and Policy Implications

The EU target of supplying 20% of its energy from renewable sources by 2020 implies to increase the domestic use of renewables significantly, and discussions on the role of renewables for 2030 and beyond are taking place (EC 2014).

- Currently, woody biomass from forests and residues is the largest source of renewables in Europe, and is expected to be used **even more** by 2020.
- For 2030, the role of woody biomass - and bioenergy in general - was analysed with a special focus on potential environmental consequences. Evaluating respective constraints such as biodiversity and GHG emissions showed that these would impact on EU forest biomass potentials.
- Extending protected forests area in the EU and restricting biomass extraction from existing forests would reduce forest potentials by 5% for 2020 and 2030. Applying strict environmental criteria will reduce biomass potential by 30 % compared to the reference potential.
- Considering time-dependent carbon balances of forest bioenergy leads to excluding high-quality roundwood from energy options to reduce GHG emissions in the timeframe of this study.
- On the other hand, the EU potentials for secondary and tertiary wood residues and wastes are high and could be mobilized through **cascading use** policies without negative impacts on biodiversity, and with high net GHG emissions reductions¹⁵.
- Bioenergy is currently also imported to the EU, and imports are expected to increase due to rising demand and cost advantages in the REF scenario. The GHG scenario could reduce imports by 50%, while the SUS scenario would allow to **phase-out imports** not only of woody bioenergy but also of biofuels and their feedstocks.

Fundamental to sustainable bioenergy use is to **reduce demand** by implementing **stringent energy efficiency targets** by 2020 and 2030, respectively. Furthermore, more environmentally-compatible non-biomass renewables such as geothermal, solar and wind should be considered, as these options have high domestic potentials and comparatively low overall cost.

Under these assumptions, the SUS scenario by 2030 uses only **about 25%** of the forest bioenergy consumed in 2010, **completely avoids imports** of woody

¹⁵ This study also analyzed non-woody bioenergy residues and waste options such as straw and manure. For the straw potentials, soil and carbon conservation was assumed as well based on IC et al. (2012).

bioenergy and biofuels, and shifts towards **domestic bioenergy residues** and wastes, mainly from wood industries and post-consumer wood, and agricultural residues (straw, manure).

In parallel, a **60% net GHG emission reduction** from the energy system (including those from C stock changes in forests) could be achieved in the SUS scenario by 2030, compared to 2010, while the REF scenario would achieve only close to 20% reduction, respectively.

A prerequisite for the GHG and SUS scenarios is to successfully introduce cascading biomass use for energy, improving biogenic waste collection and recycling, and to establish **binding sustainability requirements** for woody and gaseous bioenergy, in parallel to tightening the existing requirements for biofuels. The sustainable forest biomass potential will suffice to meet woody material demands if **resource-efficient cascades** are implemented, more paper recycled and post-consumer wood be re-used. Additional stemwood for construction material for 5% of new residential buildings in the EU by 2030 would then be available and would lead to significant GHG emission savings from substituting conventional building materials.

Current EU and Member State energy and climate policies **do not stimulate** these developments, though:

Bioenergy, forest, and waste policies are fragmented and unaligned, and incentive schemes mainly address bioenergy **without** considering the full GHG emissions from bioenergy use.

Bioenergy supply - especially from forests and for electricity/heat - is not subject to any coherent sustainability regulation. Only a few Member States such as Denmark, the Netherlands and the UK have started to develop respective policies, which might lead to imbalances within the EU if no framework regulation is implemented.

Imports of woody bioenergy is - with very few exceptions - unregulated as well, but growing relevance of pellets for bioelectricity (co-firing) imply a respective need for EU-level action to avoid internal market distortions.

Last but not least, sustainable woody bioenergy supply also requires regulating biodiversity impacts for forests in a legally binding manner for both the EU, and imports from abroad.

References

- AEBIOM (European Biomass Association) 2012: European Bioenergy Outlook 2012; Brussels
http://www.aebiom.org/wp-content/uploads/file/AEBIOM%20Statistical%20Report/AEBIOM_European%20Bioenergy%20Outlook%202012sv.pdf
- Aylott MJ et al. 200: Yield and spatial supply of bioenergy poplar and willow short-rotation coppice in the UK; in: *New Phytologist* vol. 178, pp. 358–370
- Brovkin V et al. 2012: Plant-driven variation in decomposition rates improves projections of global litter stock distribution; in: *Biogeosciences* vol. 9 pp. 565-576
- Brunner I et al. 2013: Fine root turnover rates for European forests revisited: an analysis of data from sequential coring and ingrowth cores; in: *Plant Soil* vol. 362, pp. 357-372
- CBD (Convention on Biological Diversity) 2008: COP 9 Decision IX/5. Forest biodiversity
<http://www.cbd.int/decision/cop/?id=11648>
- CENBIO (Centro Nacional de Referência em Biomassa, Brazil) 2013: Possibilities of sustainable woody energy trade and impacts on developing countries: Country Case Study Brazil; Coelho S, Escobar J; prepared for GIZ under subcontract with IINAS; Sao Paulo
http://www.iinas.org/tl_files/iinas/downloads/CENBIO_2013_Brazil-Case-Study_GIZ.pdf
- de Jong J et al. 2012: Konsekvenser av ett ökat uttag av skogsbränsle. En syntes från Energimyndighetens bränsleprogram 2007-2011. Energimyndigheten ER2012:08. Eskilstuna
<http://www.slu.se/Global/externwebben/centrumbildningar-projekt/centrum-for-biologisk-mangfald/Dokument/publikationer-cbm/Skogsbranslesyntesutkast201203.pdf>
- Drake-Brockman GR 1996: Establishment and Maintenance of a Woodfuel Resource. Forestry Research Technical note 17/96
http://www.biomassenergycentre.org.uk/pls/portal/docs/PAGE/RESOURCES/REF_LIB_RES/PUBLICATIONS/GUIDANCE/ESTABLISHMENT%20AND%20MAINTENANCE%20OF%20A%20WOODFUEL%20RESOURCE%20TDB_TN1796.PDF
- Dudley N, Phillips A 2006: Forests and Protected Areas: Guidance on the use of the IUCN protected area management categories. IUCN (International Union for Conservation of Nature), Gland, Switzerland and Cambridge
<http://data.iucn.org/dbtw-wpd/edocs/PAG-012.pdf>
- EC (European Commission) 2009: Natura 2000 sites, version January 2009; DG ENV; Brussels
- EC (European Commission) 2011: Energy Roadmap 2050; Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions; COM(2011) 885 final; Brussels
<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=COM:2011:0885:FIN:EN:PDF>
- EC (European Commission) 2011: Energy Roadmap 2050 - Impact assessment and scenario analysis; SEC(2011) 1565 final Part 1; Brussels
http://ec.europa.eu/energy/energy2020/roadmap/doc/roadmap2050_ia_20120430_en.pdf

- EC (European Commission) 2011: Energy Roadmap 2050 - Impact assessment and scenario analysis; SEC(2011) 1565 final Part 2; Brussels
http://ec.europa.eu/energy/energy2020/roadmap/doc/sec_2011_1565_part2.pdf
- EC (European Commission) 2012a: Proposal for amending Regulation (EU) No 1031/2010 in particular to determine the volumes of greenhouse gas emission allowances to be auctioned in 2013-2020
- EC (European Commission) 2012b: Proposal for a Directive of the European Parliament and of the Council amending Directive 98/70/EC relating to the quality of petrol and diesel fuels and amending Directive 2009/28/EC on the promotion of the use of energy from renewable sources COM(2012) 595 final; Brussels
- EC (European Commission) 2013: EU Energy, transport and GHG emissions trends to 2050 - Reference Scenario 2013; Capros P et al.; Brussels
http://ec.europa.eu/energy/observatory/trends_2030/doc/trends_to_2050_update_2013.pdf
- EC (European Commission) 2014: A policy framework for climate and energy in the period from 2020 to 2030; Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions; COM(2014) 15 final; Brussels
http://ec.europa.eu/energy/doc/2030/com_2014_15_en.pdf
- EEA (European Environment Agency) 2006: How much bioenergy can Europe produce without harming the environment?; Copenhagen
http://www.eea.europa.eu/publications/eea_report_2006_7
- EEA (European Environmental Agency) 2011: Forest: deadwood (SEBI 018) - Assessment published May 2010; Copenhagen <http://www.eea.europa.eu/data-and-maps/indicators/forest-deadwood/forest-deadwood-assessment-published-may-2010>
- EEA (European Environment Agency) 2013: EU bioenergy potential from a resource-efficiency perspective; EEA Report No. 6/2013; Copenhagen
<http://www.eea.europa.eu/publications/eu-bioenergy-potential>
- Eggers J et al. 2008: Impact of changing wood demand, climate and land use on European forest resources and carbon stocks during the 21st century; in: Global Change Biology vol. 14, pp. 2288–2303
- Elbersen B et al. 2012: Atlas of EU biomass potentials. Biomass Futures Deliverable 3.3: Spatially detailed and quantified overview of EU biomass potential taking into account the main criteria determining biomass availability from different sources; Wageningen http://www.biomassfutures.eu/public_docs/final_deliverables/WP3/D3.3%20Atlas%20of%20technical%20and%20economic%20biomass%20potential.pdf
- EU (European Union) 2003: Directive 2003/87/EC of the European Parliament and of the Council establishing a scheme for greenhouse gas emission allowances trading within the Community and amending Council Directive 96/61/EC; Brussels
- EU (European Union) 2009: Directive 2009/28/EC on the promotion of the use of energy from renewable sources and amending and subsequently repealing Directives 2001/77/EC and 2003/30/EC; Brussels

- EurObserv'ER 2012: Solid Biomass Barometer; Brussels <http://www.eurobserv-er.org/pdf/baro212biomass.pdf>
- EUBIONET (European Bioenergy Networks) 2003: Biomass Co-Firing - An Efficient Way To Reduce Greenhouse Gas Emissions
http://ec.europa.eu/energy/renewables/studies/doc/bioenergy/2003_cofiring_eu_bionet.pdf
- Evans S et al. 2007: Final Report: Yield models for Energy: Coppice of Poplar and willow. Volume A – Empirical Models; Report to DTI (B/W2/00624/00/00URN)
- FAO (Food and Agricultural Organization of the United Nations) 2010: Global Forest Resources Assessment. Main report; Rome <http://www.fao.org/docrep/013/i1757e/i1757e.pdf>
- Finér et al. 2011: Fine root production and turnover in forest ecosystems in relation to stand and environmental characteristics; in: Forest Ecology and Management vol. 262, pp. 2008-2023
- Forest Europe 2011: State of Europe's Forests 2011 – Status and Trends in Sustainable Forest Management in Europe; jointly prepared by Forest Europe Liaison Unit Oslo, UNECE and FAO; Oslo
http://www.foresteuropa.org/filestore/foresteuropa/Publications/pdf/Forest_Europe_report_2011_web.pdf
- Franke B et al. 2012: Global Assessments and Guidelines for Sustainable Liquid Biofuels. A GEF Targeted Research Project; Heidelberg etc.
<http://www.unep.org/bioenergy/Portals/48107/doc/activities/GEF%20Liquid%20Biofuel%20Project.pdf>
- Fritsche U et al. 2012: Outcome paper: Sustainability Criteria and Indicators for Solid Bioenergy from Forests based on the Joint Workshops on Extending the RED Sustainability Requirements to Solid Bioenergy; Darmstadt etc.
http://www.iinas.org/tl_files/iinas/downloads/Joint_WS_Outcome_Paper_2012.pdf
- Fritsche U et al. 2014: Extending the EU Renewable Energy Directive sustainability criteria to solid bioenergy from forests; in: Natural Resources Forum; article first published online: 22 APR 2014 <http://doi.org/10.1111/1477-8947.12042>
- GP (Greenpeace International), EREC (European Renewable Energy Council), GWEC (Global Wind Energy Council) 2012: Energy Revolution: A Sustainable World Energy Outlook; Amsterdam
<http://www.greenpeace.org/international/Global/international/publications/climate/2012/Energy%20Revolution%202012/ER2012.pdf>
- Gravalos I et al. 2010: A Study On Calorific Energy Values Of Biomass Residue Pellets For Heating Purposes. FORMEC 2010. Forest Engineering: Meeting the Needs of the Society and the Environment. July 11 – 14, 2010; Padova
- Gustafsson L et al. 2012: Retention Forestry to Maintain Multifunctional Forests: A World Perspective; in: BioScience vol. 62, pp. 633–645
- Hanski I, Walsh M 2004: How much, how to? Practical tools for forest conservation; BirdLife European Forest Task Force; Brussels

- Hessen-Forst 2011: Naturschutzleitlinie für den Hessischen Staatswald; Kassel
http://www.hessen-forst.de/service/NLL_11_Internet_neu2.pdf
- IC (Imperial College London) et al. 2012: Biomass Futures – Analysing Europe’s Future Bioenergy Needs; collaborative EEU-IEE project carried out by Alterra, CRES, ECN, IC, ICCS, IEEP, IIASA, and Oeko-Institut; London etc. <http://www.biomassfutures.eu>
- IINAS (International Institute for Sustainability Analysis and Strategy) 2013: Global Emissions Model for integrated Systems (GEMIS) version 4.8 <http://www.iinas.org/gemis.html>
- IINAS (International Institute for Sustainability Analysis and Strategy) 2014: Possibilities of sustainable woody bioenergy trade and impacts on developing countries - summary report; Fritsche U, Iriarte L, Gress HW; commissioned by GIZ; Darmstadt, Madrid
http://www.iinas.org/tl_files/iinas/downloads/IINAS_2013_Sust_Woody_Bioenergy_summary_report_GIZ.pdf
- IINAS (International Institute for Sustainability Analysis and Strategy), CENBIO (Centro Nacional de Referência em Biomassa, Brazil) 2014: Possibilities of sustainable woody bioenergy trade and impacts on developing countries - final report; Fritsche U et al.; commissioned by GIZ; Darmstadt, Madrid, Sao Paulo
http://www.iinas.org/tl_files/iinas/downloads/IINAS_CENBIO_2014_Sust_Woody_Bioenergy_GIZ_full.pdf
- IPCC (Intergovernmental Panel on Climate Change) 2006: 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Prepared by the National Greenhouse Gas Inventories Programme; Eggleston H S et al. (eds.); IGES, Japan
- IPCC (Intergovernmental Panel on Climate Change) 2003: Good practice guidance for land use, land-use change and forestry; Penman J et al. (eds.) Kanagawa, Japan
- ISI (Fraunhofer Institut für System- und Innovationsforschung) 2012a: Policy Report - Contribution of Energy Efficiency Measures to Climate Protection within the European Union until 2050; published by BMU; Karlsruhe http://www.isi.fraunhofer.de/isi-media/docs/e/de/publikationen/BMU_Policy_Paper_20121022.pdf
- ISI (Fraunhofer Institut für System- und Innovationsforschung) 2012b: Concrete Paths of the European Union to the 2°C Scenario: Achieving the Climate Protection Targets of the EU by 2050 through Structural Change, Energy Savings and Energy Efficiency Technologies. Accompanying scientific report – Contribution of energy efficiency measures to climate protection within the European Union until 2050; Karlsruhe
http://www.isi.fraunhofer.de/isi-media/docs/e/de/publikationen/Begleitbericht_Contribution-to-climate-protection_final.pdf
- Janowiak M, Webster C 2010: Promoting Ecological Sustainability in Woody Biomass Harvesting; in: Journal of Forestry vol. 108 no. 1, pp.16-23
<http://cemendocino.ucdavis.edu/files/131364.pdf>
- JRC (Joint Research Centre) 2013: European forest yield table database
- Keegan D et al. 2013: Cascading use: a systematic approach to biomass beyond the energy sector; in: Biofuels, Bioproducts and Biorefining vol. 7, pp. 193-206

- Lattimore B et al. 2009: Environmental factors in woodfuel production: Opportunities, risks, and criteria and indicators for sustainable practices; in: Biomass and Bioenergy vol. 33, no. 10, pp. 1321–1342
- Li Z et al. 2003: Belowground biomass dynamics in the Carbon Budget Model of the Canadian Forest Sector: recent improvements and implications for the estimation of NPP and NEP; in: Canadian Journal of Forest Research vol. 33, pp. 126-136
- Lindholm E-L et al. 2011: Greenhouse gas balance of harvesting stumps and logging residues for energy in Sweden; in: Scandinavian Journal of Forest Research vol. 26, no. 6 pp. 586-594
- Manomet (Manomet Center for Conservation Sciences) 2010: Biomass Sustainability and Carbon Policy Study
[http://www.manomet.org/sites/manomet.org/files/Manomet Biomass Report Full LoRez.pdf](http://www.manomet.org/sites/manomet.org/files/Manomet_Biomass_Report_Full_LoRez.pdf)
- Mantau U et al. 2010a: EUwood - Real potential for changes in growth and use of EU forests. Final report; Hamburg, etc.
- Mantau U et al. 2010b: EUwood - Real potential for changes in growth and use of EU forests. Methodology report; Hamburg etc.
- Mantau U 2012: Wood flows in Europe (EU27); Project report; Celle
- Mantau U 2013: Wood modelling on wood availability and direct CO2 mitigation in the wood flow; presented at the Workshop The future role of biomass in 2030 EU energy policy; CAN-BirdLife-WWF-EEB; 11th July 2013 Brussels
- McKendry P 2002: Energy production from biomass (part 1): overview of biomass; in: Bioresource Technology vol. 83, pp. 37–46
- Moore et al. 1999: Litter decomposition rates in Canadian forests; in: Global Change Biology vol. 5, pp. 75-82
- Müller J, Bütler R 2010: A review of habitat thresholds for dead wood: a baseline for management recommendations in European forests; in: European Journal of Forest Research vol. 129, pp. 981–992
- Nabuurs G et al. 2007: Future harvesting pressure on European forests; in: European Journal of Forest Research vol. 126, pp. 391–400
- Nakicenovic N et al. 2000: IPCC Special Report on Emissions Scenarios (SRES).
- ORNL (Oak Ridge National Laboratory) 2011: Heat Content Ranges for Various Biomass Fuels; Oak Ridge <http://cta.ornl.gov/bedb/index.shtml>. Accessed 17 June 2013
- OEKO (Oeko-Institut - Institute for applied ecology) 2011: The Vision Scenario for the European Union - 2011 Update for the EU-27; sponsored by Greens/EFA Group in the European Parliament; Berlin
<http://www.oeko.de/files/forschungsergebnisse/application/octet-stream/download.php?id=1113>
- OMAFRA 2001: Biomass Burn Characteristics Factsheet. Ontario Ministry of Agriculture and Food. <http://www.omafra.gov.on.ca/english/engineer/facts/11-033.htm#3>. Accessed 17 June 2013.

- Pontailier J Y, Ceulemans R, Guittet J 1999: Biomass yield of poplar after five 2-year rotations; in: *Forestry* vol. 72, no. 2, pp. 157-163
- Proforest 2003: The High Conservation Value Forest Toolkit. HCVF Toolkit Part 1: Introduction to HCVF. <http://www.proforest.net/objects/publications/HCVF/hcvf-toolkit-part-1-final-updated.pdf>
- Repo A, Tuomi M, Liski J 2011: Indirect carbon dioxide emissions from producing bioenergy from forest harvest residues; in: *GCB Bioenergy* vol. 3, pp. 107–115
- Sallnäs O 1990: A matrix model of the Swedish forest; in: *Studia Forestalia Suecica* vol. 183, pp. 23.
- Schelhaas M J et al. 2007: Model documentation for the European Forest Information Scenario model (EFISCEN 3.1.3). Alterra Report 1559 and EFI Technical Report 26. Alterra and European Forest Institute; Wageningen, Joensuu
- Schmitt C B et al. 2009: Global analysis of the protection status of the world's forest; in: *Biological Conservation* vol. 142, pp. 2122–2130
- Schwarzbauer P, Stern T 2010: Energy vs. material: Economic impacts of a “wood-for-energy scenario” on the forest-based sector in Austria — A simulation approach; in: *Forest Policy and Economics* vol. 12 pp. 31–38
- Shorohova E, Kapitsa E, Vanha-Majamaa I 2008: Decomposition of stumps in a chronosequence after clear-felling vs. clear-felling with prescribed burning in a southern boreal forest in Finland; in: *Forest Ecology and Management* vol. 255 pp. 3606–3612
- Siitonen J, Berglund H 2009: Preserving biodiversity in bioenergy harvesting http://www.tapio.fi/files/tapio/Eng%20sivut/preserving_biodiversity_in_forest_bioenergy_harvest.pdf
- Sikkema R et al. 2013: The GHG contribution of the cascaded use of harvested wood products in comparison with the use of wood for energy - A case study on available forest resources in Canada; in: *Environmental Science and Policy* vol. 31, pp. 96-108
- Swedish Forest Agency 2008: Recommendations for extraction of harvesting residues and ash recycling. English translation of Rekommendationer vid uttag av avverkningsrester och askåterföring. Swedish Forest Agency Meddelande (Letter) 2. ISSN 1100-0295
- Teske S et al. 2012: energy [r]evolution - A Sustainable EU 27 Energy Outlook; Greenpeace International, European Renewable Energy Council, DLR; Brussels
- Tikkanen O et al. 2012: To thin or not to thin: bio-economic analysis of two alternative practices to increase amount of coarse woody debris in managed forests; in: *European Journal of Forest Research* vol. 131 no 5, pp. 1411–1422
- UNECE (United Nations Economic Commission for Europe), FAO (Food and Agricultural Organization of the United Nations) 2000: Forest Resources of Europe, CIS, North America, Australia, Japan and New Zealand. Geneva Timber and Forest Discussion Paper 17. ECE/TIM/SP/17; Geneva
- UNECE (United Nations Economic Commission for Europe), FAO (Food and Agricultural Organization of the United Nations) 2011: The European Forest Sector Outlook Study II; Geneva

- Uslu A, van Stralen J 2012: Biomass Futures scenario setup and the methodology for analysis. Deliverable D5.2 of the Biomass Futures Project; ECN; Petten
- Uslu A et al. 2012: Use of sustainable biomass to produce electricity, heat and transport fuels in EU27; A model-based analysis of biomass use for 2020 and 2030. Deliverable D5.3 of the Biomass Futures project; ECN; Petten
http://www.biomassfutures.eu/public_docs/final_deliverables/WP5/D5.3%20Results%20summary%20for%20WP7.pdf
- van Stralen J et al. 2013: The role of biomass in heat, electricity, and transport markets in the EU27 under different scenarios; in: Biofuels, Bioproducts & Biorefining vol 7 pp. 147–163
- Verkerk P et al. 2011a: Assessing impacts of intensified biomass removal on deadwood in European forests; in: Ecological Indicators vol. 11, pp. 27-35
- Verkerk P et al. 2011b: The realisable potential supply of woody biomass from forests in the European Union; in: Forest Ecology and Management vol. 261, pp. 2007-2015
- Volpi G 2014: Update on EU policy on bioenergy sustainability; presented at the BiomassPolicies Sustainability Workshop May 14, 2014 in Brussels
- Weih M 2004: Intensive short rotation forestry in boreal climates: present and future perspectives. Canadian Journal of Forest Research vol. 34, pp. 1369–1378
- Zweiring MH et al. 1990: Modeling of bacterial growth curve; in: Applied and Environmental Microbiology vol. 56, no. 6, pp. 1875-1881